



**NEIEC**

**NINGBO EVERRISING**



**NEIEC**

TEL:0086-574-27872111 87292322 87707157  
FAX:0086-574-27872333 87292320  
<http://www.neiec.cn>  
E-mail:[neiec@neiec.cn](mailto:neiec@neiec.cn)  
FACTORY:  
NO.118 Meijing Road,High-Tech Zone,Ningbo,China

2019-2020

[www.neiec.cn](http://www.neiec.cn)



# COMPANY PROFILE

Ningbo Everrising Intelligent Technology Co.,Ltd is a comprehensive enterprise focused on smart home supporting products and professional indoor & outdoor LED lighting's development, design, production, sales, and provided a full range of intelligent home products customized solutions, production and after-sales service.

Ningbo Everrising Intelligent Technology Co.,Ltd was set up in 2010 , which covers an area of 10000 square meters. It has more than 300 employees. One research and development center has been built which includes over 60 engineers and technicians who are engaged in light analysis, optical design, thermal design and circuit-driven design, and has introduced 77 units various types of advanced machinery and equipments. Now we have over 30 all kinds product patents. We also has established advanced products laboratory, quality testing room to ensure and enhance the quality of the company's products.

We engaged in providing high-quality and good-performance LED products and solution for all customers including professional channel customers and terminal customers.

Ningbo Everrising Intelligent Technology Co.,Ltd advocated international, standardised and scientized management, adhere to the "quality first, customer supreme" the management objective. Integrity, responsibility, innovation, mutual benefits is our core values. We will adhere to bring forth new ideas in the business philosophy, brand building, product development and business models in the future, to provide customers with intelligent, comfortable, safe, green, environmentally friendly lighting products, our company will always dedicate to be both the promoter and leader in LED Energy-efficient lighting technology in China.



## TABLE OF CONTENTS

1. LIGHT SOURCE
7. STRIP LIGHT
9. PURIFIED LAMP
10. TUBE & FITTING
12. DOWN LIGHT
16. PANEL LIGHT
22. WALL LAMP
25. TRACK LIGHT
26. FLOOD LIGHT
30. Highbay Light
31. STREET LIGHT
33. SOLAR SERIES
38. EMERGENCY LIGHT
39. GARDEN LIGHT




## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T10030A	AC85-265V	30	100	185	50	53*53*40
T12040A	AC85-265V	40	120	225	30	62.5*38*48
T14050A	AC85-265V	50	140	240	30	72.5*43.5*50
T15070A	AC85-265V	70	150	275	20	78*32*57



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T5005C	AC85-265V	5	50	95	100	52.5*27*22
T6010C	AC85-265V	10	60	115	100	62.5*32*25
T7015C	AC85-265V	15	70	130	60	44*37*28.5
T8018C	AC85-265V	18	80	145	30	42*34*31
T10028C	AC85-265V	28	100	165	20	52*32*36
T12038C	AC85-265V	38	120	205	20	60*25*41
T13550C	AC85-265V	50	135	210	20	68.5*28*48



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T5005X	AC85-265V	5	50	103	100	52.5*27*22.5
T6010X	AC85-265V	10	60	117	100	62.5*32*25.5
T7015X	AC85-265V	15	70	132	100	72.5*37*28.5
T8020X	AC85-265V	20	80	147	100	82.5*42*31.5
T10030X	AC85-265V	30	100	175	50	52*52*37
T11540X	AC85-265V	40	115	200	30	59.5*36.5*42
T12550X	AC85-265V	50	125	215	30	64.5*26.5*45



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T11550H	AC85-265V	50	117		30	63*38*51
T150100H	AC85-265V	100	152		20	79.5*33*60
T165150H	AC85-265V	150	167		20	70*36*60
T185200H	AC85-265V	200	187		16	78*40*67




## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	BODY CARTON(cm)
T14050P	AC85-265V	50	140		20	77*31.5*44
T17080P	AC85-265V	80	170		20	89.5*36.5*49
T190100P	AC85-265V	100	190		10	97*39.5*29
T230150P	AC85-265V	150	230		8	49*49*58




## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX6005E	AC85-265V	5	60	107	100	64*33*25.5
YX7010E	AC85-265V	10	72	122	100	42*42*58
YX8515E	AC85-265V	15	84	137	50	49.5*49.5*33.5
YX9520E	AC85-265V	20	96	157	50	52*52*36.5
YX12030E	AC85-265V	30	120	188	30	69.5*42.5*44
YX12030E	AC85-265V	30	120	188	30	69.5*42.5*44



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T4007L	AC85-265V	7	40	117	200	43*43*25.5
T4009L	AC85-265V	9	40	138	100	43*22*29
T5012L	AC85-265V	12	50	175	100	53*27*36.5
T5018L	AC85-265V	15	50	175	100	53*27*36.5
T6024L	AC85-265V	3	60	190	50	61*31*21



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T3707T	AC85-265V	7	37	104	100	39*20.5*24.5
T3709T	AC85-265V	9	37	115	100	39*20.5*25
T4412T	AC85-265V	12	44	139	100	48*25*29
T5015T	AC85-265V	15	50	145	100	53*27.5*31.5




## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
A5507B	AC85-265V	7	55	105	100	31.5*31.5*48.5
A6009B	AC85-265V	9	60	110	100	35.5*35.5*54.4
A6012B	AC85-265V	12	60	120	100	35.5*35.5*58.5
A7015B	AC85-265V	15	70	130	100	37.5*37.5*56.5
A8018B	AC85-265V	18	80	140	100	42.5*42.5*60
C3703A	AC85-265V	3	37	100	200	43.5*22.5*44
C3705A	AC85-265V	5	37	120	200	43.5*22.5*50



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX040G	AC85-265V	36	80	245	50	54*42*42
YX050X	AC85-265V	48	101	243	30	51.5*32*52.5

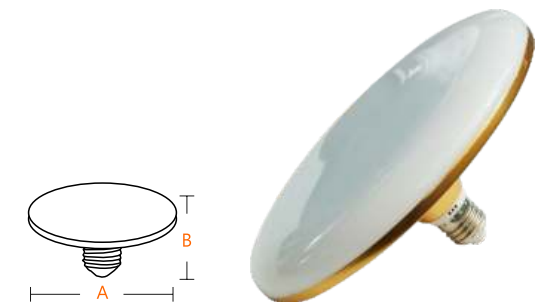


## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX9312D	AC85-265V	12	93	80	100	47*47*38
YX12018D	AC85-265V	18	120	84	50	69.5*44.5*29.5
YX15024D	AC85-265V	24	150	88	30	50*48*32
YX18536D	AC85-265V	36	185	95	30	55*58*40
YX22050D	AC85-265V	50	220	100	20	58*46*46.5



## PARAMETER


Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
LC05G5.3C	AC85-265V	5/7	50	55	100	27*27*24
LC05G5.3S	AC85-265V	5/7	50	55	100	27*27*24
LC05G5.3E	AC85-265V	5/7	50	55	100	27*27*24



YUL016A YSL012A

## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YUL007A	AC85-265V	7	40	131	100	47*24*32
YUL009A	AC85-265V	9	40	140	100	47*24*32
YUL012A	AC85-265V	12	53	175	100	59*30*39.5
YUL016A	AC85-265V	16	125	260	100	64*32.5*39
YSL007A	AC85-265V	7	40	120	100	54*27.5*28
YSL009A	AC85-265V	9	40	130	100	54*27.5*28
YSL012A	AC85-265V	12	61	150	100	66.5*27.5*28

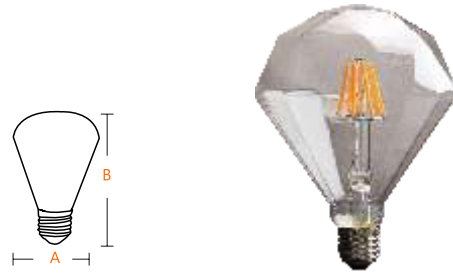


## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX9504J	AC220-240V	4	80	118	100	39*20*28
YX9506J	AC220-240V	6	95	138	100	39*20*28
YX9508J	AC220-240V	8	125	170	100	39*20*28



## PARAMETER


Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
C3504C	AC220-240V	4	35	118	100	42.5*22*28
G4506B	AC220-240V	6	45	81	100	58*30*21.6
A6008C	AC220-240V	8	60	103	100	68*35*26.5



DR9010A DR9040A T2504Q


## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
DR9010A	AC220-240V	10	275	118	20	66*66*40
DR9040A	AC220-240V	40	275	118	20	66*66*40
T2504Q	AC220-240V	4	125	30	100	42*22*25.5

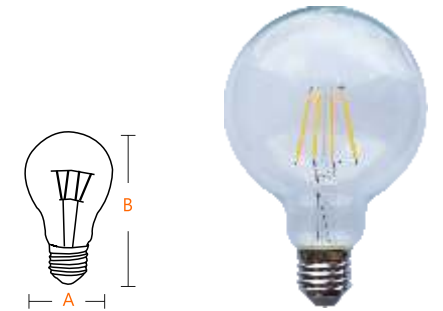


## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
G8004S	AC220-240V	4	80	118	100	39*20*28
G9506S	AC220-240V	6	95	138	100	39*20*28
G12508S	AC220-240V	8	125	170	100	39*20*28

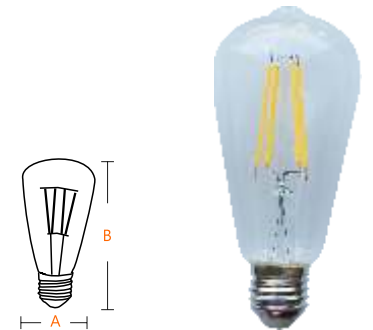

## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX6406H	AC220-240V	4	64	140	100	69*35.5*32
YX6406H	AC220-240V	6	64	140	100	69*35.5*32
YX6406H	AC220-240V	8	64	140	100	69*35.5*32

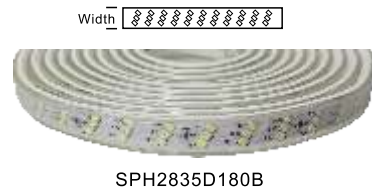


## PARAMETER

Model	Voltage	Ship Power (w)	Dimension(mm) A	M/CTN	Packing CARTON(cm)
SPH2835D180B	AC230V	0.1	12	50	32*32*15
SPH2835D180B	AC230V	0.2	12	50	32*32*15




## PARAMETER

Model	Voltage	Power (w)	Width(mm)	M/CTN	Packing CARTON(cm)
SPH5050D60C	AC230V	0.5	10	50	31*31*11.2
SPH5050D96D	AC230V	0.5	12	50	32*32*15
SPH5050D120D	AC230V	0.5	12	50	32*32*15

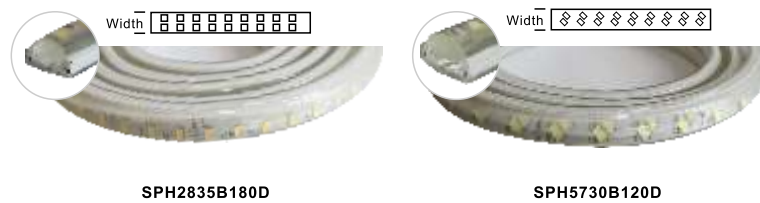

## PARAMETER

Model	Voltage	Power (w)	Width(mm)	M/CTN	Packing CARTON(cm)
SPH5730B120D	AC230V	0.3/0.5	12	50	33*33*15
SPH2835B180D	AC230V	0.1/0.2	12	50	33*33*15

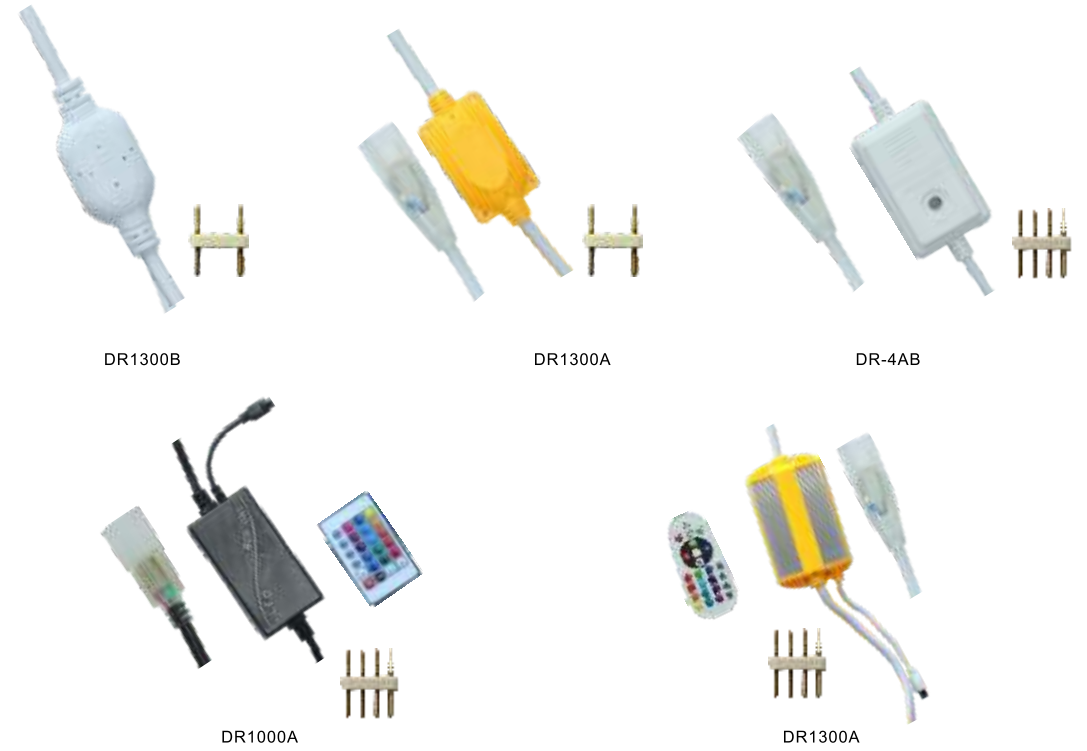


## PURIFIED LAMP



### PARAMETER


Model	Voltage	Power (w)	Length(mm)	Packing	
				PCS/CTN	CARTON(cm)
PFL020A	AC175-265V	20	600	20	65*27*17
PFL040A	AC175-265V	40	1200	20	125*27*17
PFL018E	AC175-265V	18	600	30	62*28*18.5
PFL036E	AC175-265V	36	1200	30	122*28*18.5

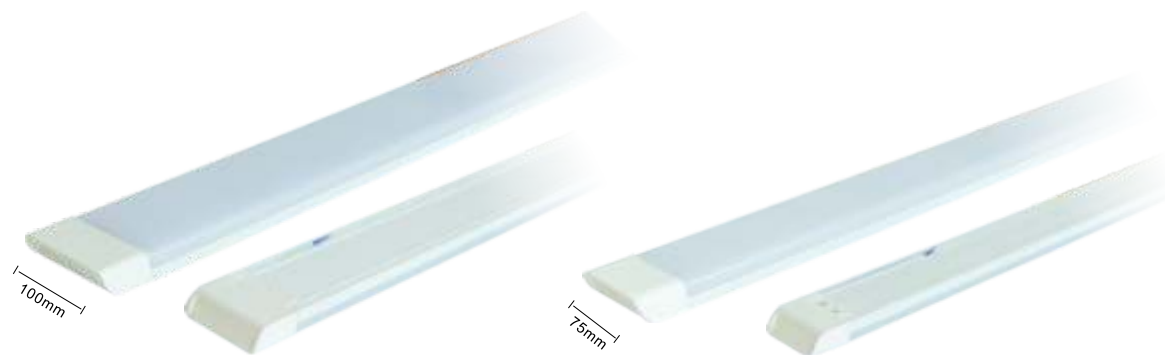

### PARAMETER


Model	Voltage	Power (w)	Length(mm)	Packing	
				PCS/CTN	CARTON(cm)
PFL060A	AC85-265V	60	1200	20	125*27*17
PFL100A	AC85-265V	100	1200	20	125*37*17

## TUBE & FITTING

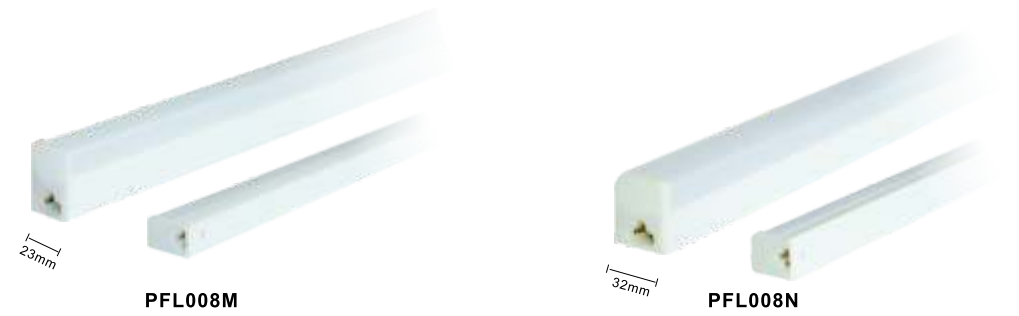

### PARAMETER

Model	Voltage	Power (w)	Length(mm)	Packing	
				PCS/CTN	CARTON(cm)
PFL008M	AC175-265V	8	600	50	66*34.5*16
PFL018M	AC175-265V	18	1200	50	126*34.5*16
PFL008N	AC175-265V	8	600	50	66*34.5*16
PFL018N	AC175-265V	18	1200	50	126*34.5*16

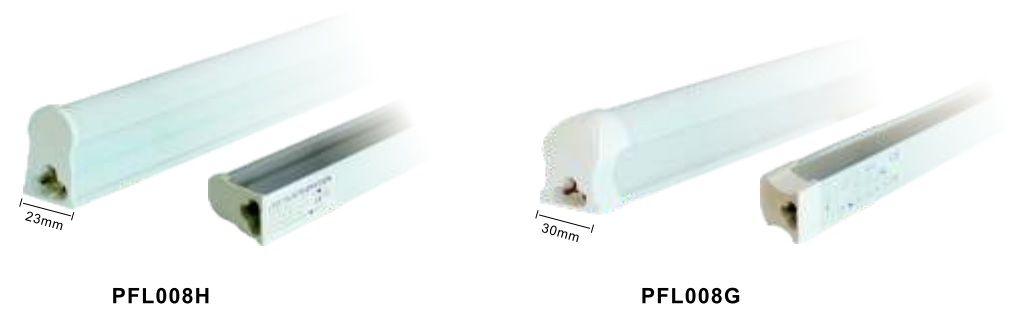

### PARAMETER

Model	Voltage	Power (w)	Length(mm)	Packing	
				PCS/CTN	CARTON(cm)
PFL008G	AC175-265V	8	600	50	66*34.5*16
PFL018G	AC175-265V	18	1200	50	126*34.5*16
PFL008H	AC175-265V	8	600	50	66*34.5*16
PFL018H	AC175-265V	18	1200	50	126*34.5*16

## TUBE & FITTING



TF1060B

TF2060B

### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
TF1060B	\	\	600	33	30	63.5*17.3*16.3
TF1120B	\	\	1200	33	30	123.5*17.3*16.3
TF2060B	\	\	600	33	30	63.5*17.3*16.3
TF2120B	\	\	1200	33	30	123.5*17.3*16.3



TF1060A

TF1060D

TF2120F

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
TF1060D/A	\	\	600	33/40	30	63.5*17.3*16.3
TF1120D/A	\	\	1200	33/40	30	123.5*17.3*16.3
TF2060D/A	\	\	600	33/40	30	63.5*17.3*16.3
TF2120D/A	\	\	1200	33/40	30	123.5*17.3*16.3
TF1060F	\	\	600	40	30	64*21.5*15.5
TF1120F	\	\	1200	40	30	64*21.5*15.5
TF2060F	\	\	600	40	30	124*21.5*15.5
TF2120F	\	\	1200	40	30	124*21.5*15.5



### PARAMETER

Model	Power (w)	Lumen	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
TL0809F	9	600lm	600	26	30	64.5*21*18
TL0810F	10	800lm	600	26	30	64.5*21*18
TL0810F	10	900lm	600	26	30	64.5*21*18
TL0813F	13	1250lm	600	26	30	64.5*21*18
TL0818F	18	1200lm	1200	26	30	124.5*21*18
TL0820F	20	1600lm	1200	26	30	124.5*21*18
TL0820F	20	1800lm	1200	26	30	124.5*21*18
TL0825F	25	2300lm	1200	26	30	124.5*21*18

## DOWN LIGHT




### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL005A/007A	AC85-265V	5/7	93	47	70	100	52*24.4*42.5
DLL010A	AC85-265V	10	128	56	110	50	67*27*28.5
DLL015A	AC85-265V	15	160	58	140	40	53*36*36.5
DLL030A	AC85-265V	30	216	60	200	20	46*29.5*46.5




# DOWN LIGHT

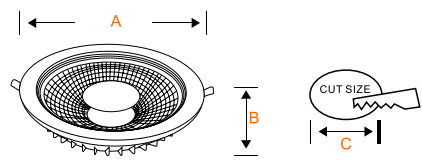

## PARAMETER


Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL007D	AC85-265V	7	88	54	70	100	49*29*41
DLL010D	AC85-265V	10	119	57	100	50	67*27*28.5
DLL015D	AC85-265V	15	173	51	150	40	52*37.5*38
DLL030D	AC85-265V	30	221	55	200	30	47.5*29*48

# DOWN LIGHT

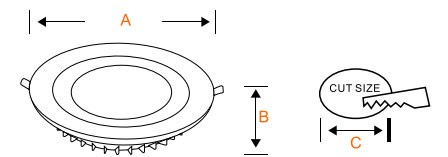

## PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL007X	AC85-265V	7	90	50	80	120	53*42*37
DLL010X	AC85-265V	10	90	50	80	120	53*42*37
DLL015X	AC85-265V	15	120	50	110	80	53*43.5*28.5
DLL022X	AC85-265V	22	170	50	160	40	58*36*39.5
DLL030X	AC85-265V	30	225	50	210	20	58*47.5*26

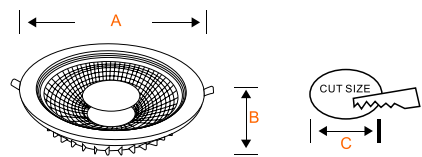

## PARAMETER


Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL007D	AC85-265V	7	88	54	70	100	49*29*41
DLL010D	AC85-265V	10	119	57	100	50	67*27*28.5
DLL015D	AC85-265V	15	173	51	150	40	52*37.5*38
DLL030D	AC85-265V	30	221	55	200	30	47.5*29*48



DLL080M




DLL060L

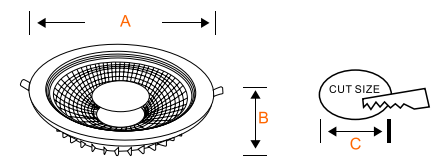

## PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL080M	AC85-265	80	225	110	220	10	59.5*26.5*51.5
DLL060L	AC85-265	60	225	110	220	10	59.5*26.5*51.5

## DOWN LIGHT



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
DLL015F	AC85-265V	15	167	40	40	57.5*37.5*38
DLL030F	AC85-265V	30	220	40	20	47*27*47.5
DLL040F	AC85-265V	40	300	40	10	63*32.5*33.5

## PANEL LIGHT




PLL003BR




PLL003AR

★ALUMINIUM



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL003BR	AC85-265V	3	85	70	100	57.5*27.5*30
PLL006B(A)R	AC85-265V	6	120	105	60	44*27.5*35
PLL009BR	AC85-265V	9	145	130	60	53*27.5*43
PLL012B(A)R	AC85-265V	12	170	155	40	41*27.5*46
PLL018B(A)R	AC85-265V	18	220	205	40	52*25*53.5
PLL024B(A)R	AC85-265V	24	300	285	20	53*33.5*34.5



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL024QR	AC85-265V	24	220	58	20	46.5*35*52
PLL036QR	AC85-265V	36	300	58	10	63*45*32.5




PLL003BS



PLL003AS


★ALUMINIUM



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL003BS	AC85-265V	3	85	70	100	57.5*27.5*30
PLL006B(A)S	AC85-265V	6	120	105	60	44*27.5*35
PLL009BS	AC85-265V	9	145	130	60	53*27.5*43
PLL012B(A)S	AC85-265V	12	170	155	40	41*27.5*46
PLL018B(A)S	AC85-265V	18	220	205	40	52*25*53.5
PLL024B(A)S	AC85-265V	24	300	285	20	53*33.5*34.5


# PANEL LIGHT



## PARAMETER


Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL008AGR	AC85-265V	8	100	30	45	32.2*32.2*15
PLL012AGR	AC85-265V	12	130	30	45	41.5*41.5*15
PLL018AGR	AC85-265V	18	185	30	32	38*38*24.7
PLL022AGR	AC85-265V	22	225	30	24	45.6*45.6*20

# PANEL LIGHT




## PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL008AFR	AC85-265V	8	100	25	70	45	32.2*32.2*15
PLL012AFR	AC85-265V	12	130	25	100	45	41.5*41.5*15
PLL018AFR	AC85-265V	18	185	25	160	32	38*38*24.7
PLL022AFR	AC85-265V	22	225	25	200	24	45.6*45.6*20



## PARAMETER



Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL012AGS	AC85-265V	12	130	30	45	41.5*41.5*18.5
PLL018AGS	AC85-265V	18	185	30	32	38*38*28.7
PLL022AGS	AC85-265V	22	220	30	24	45.6*45.6*22



## PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL008AFS	AC85-265V	8	100	25	70	45	32.5*32.5*15
PLL012AFS	AC85-265V	12	130	25	100	45	41.5*41.5*18.5
PLL018AFS	AC85-265V	18	185	25	160	32	38*38*28.7
PLL022AFS	AC85-265V	22	225	25	200	24	45.6*45.6*22


## PANEL LIGHT

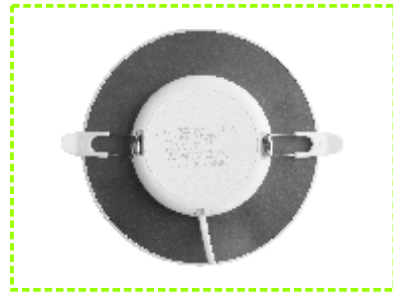

### PARAMETER



Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL016AJR	AC85-265V	16	120	30	70	60	40.5*39.5*27.5
PLL024AJR	AC85-265V	24	170	30	100	60	55.5*39.5*37.5
PLL032AJR	AC85-265V	32	225	30	100	40	47.5*39.5*47.5

## PANEL LIGHT




### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL010YR	AC85-265V	10	85	28	70	100	69*25*28.5
PLL018YR	AC85-265V	18	120	28	100	50	84*25*33.5
PLL024YR	AC85-265V	24	170	28	150	30	53.5*47*23.5
PLL036YR	AC85-265V	36	225	28	200	20	47*47*28.5

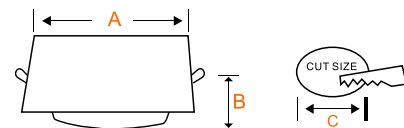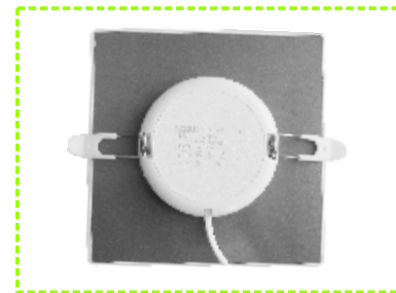

### PARAMETER


Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL016AJS	AC85-265V	16	120	30	70	60	40.5*39.5*27.5
PLL024AJS	AC85-265V	24	170	30	100	60	55.5*39.5*37.5
PLL032AJS	AC85-265V	32	225	30	100	40	47.5*39.5*47.5



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL010YS	AC85-265V	10	85	28	70	100	69*25*28.5
PLL018YS	AC85-265V	18	120	28	100	50	84*25*33.5
PLL024YS	AC85-265V	24	170	28	150	30	53.5*47*23.5
PLL036YS	AC85-265V	36	225	28	200	20	47*47*28.5

## PANEL LIGHT



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL005ALR	AC85-265V	5	85	17	75	100	57*33*25.5
PLL009ALR	AC85-265V	9	117	17	105	50	68*33*19.5
PLL015ALR	AC85-265V	15	167	18	155	40	38.5*33*44.5
PLL022ALR	AC85-265V	22	220	20	205	20	47.5*33*28

## PANEL LIGHT&WALL LAMP




PLL006DR/S



PLL006FR/S




PLL006ER/S



PLL006CR/S

### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL006C/D/E/F	AC220-240V	3+3	105	75	100	67*43.5*27.5
PLL009C/D/E/F	AC220-240V	6+3	145	105	50	84.4*22*34.5
PLL016C/D/E/F	AC220-240V	12+4	195	155	30	64.5*43.5*22.5
PLL024C/D/E/F	AC220-240V	18+6	245	210	20	54.5*43.5*28

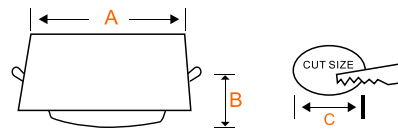

### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL005ALS	AC85-265V	5	85	17	75	100	57*33*25.5
PLL009ALS	AC85-265V	9	117	17	105	50	68*33*19.5
PLL015ALS	AC85-265V	15	167	18	155	40	38.5*33*44.5
PLL022ALS	AC85-265V	22	220	20	205	20	47.5*33*28



A



B



C

### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing		
			A	B	PCS/CTN	CARTON(cm)	
GLL015A	AC85-265V	15	210	110	65	40	41.5*31*57
GLL020A	AC85-265V	20	270	145	75	20	49*37.5*44
GLL015B	AC85-265V	15	160	65		40	69*36*35.5
GLL020B	AC85-265V	20	225	75		20	46.5*40*46
GLL015C	AC85-265V	15	160	160	65	40	69*36*35.5
GLL020C	AC85-265V	20	225	225	75	20	46.5*40*46


## PANEL LIGHT



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)	Packing	
				PCS/CTN	CARTON(cm)
PLL036J	AC85-265V	36	595*595	4	61.5*9.5*61.5
PLL048J	AC85-265V	48	595*595	4	61.5*9.5*61.5

## PANEL LIGHT

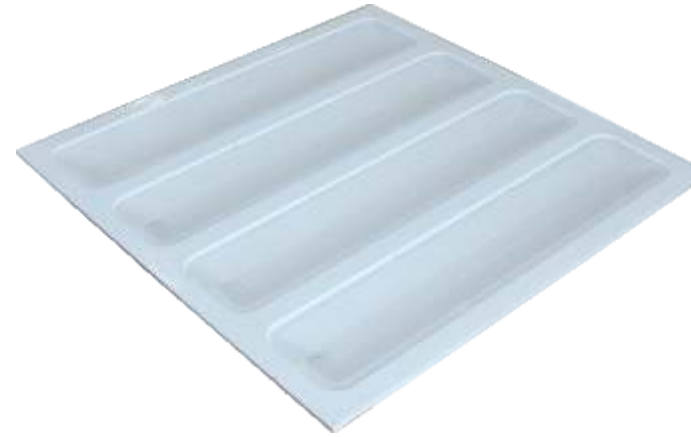

### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)	Packing	
				PCS/CTN	CARTON(cm)
GRL072D	AC85-265V	72	595*595	10	62*32*62.5
GRL100D	AC85-265V	100	595*595	10	62*32*62.5
GRL120D	AC85-265V	120	595*595	10	62*32*62.5



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)	Packing	
				PCS/CTN	CARTON(cm)
PLL072X	AC85-265V	72	595*595	10	62*32*62.5
PLL096X	AC85-265V	96	595*595	10	62*32*62.5
PLL120X	AC85-265V	120	595*595	10	62*32*62.5



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)	Packing	
				PCS/CTN	CARTON(cm)
PLL072AK	AC85-265V	72	595*595	10	62*32*62.5
PLL096AK	AC85-265V	96	595*595	10	62*32*62.5
PLL120AK	AC85-265V	120	595*595	10	62*32*62.5

## TRACK LIGHT



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)
TRL010G	AC85-265V	10W	Φ70*L100
TRL020G	AC85-265V	20W	Φ80*L125
TRL030G	AC85-265V	30W	Φ90*L130
TRL040G	AC85-265V	40W	Φ98*L140



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)
TRL030J	AC85-265V	30W	Φ76*L185
TRL040J	AC85-265V	40W	Φ86*L210



### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)
TRL012H	AC85-265V	12W	Φ68*L95
TRL024H	AC85-265V	24W	Φ76*L115
TRL036H	AC85-265V	36W	Φ86*L130




### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)
TRL030F	AC85-265V	30	Φ75*H170
TRL040F	AC85-265V	40	Φ85*H180




## FLOOD LIGHT

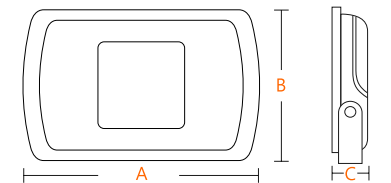

### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL050BF	AC85-265V	50	230	183	65	10	38*34*24.5
FLL100BF	AC85-265V	100	270	215	65	10	44*34*28.5
FLL200BF	AC85-265V	200	358	293	65	5	34*30.5*37
FLL300BF	AC85-265V	300	420	325	68	1	43*33.5*69
FLL400BF	AC85-265V	400	530	338	68	1	54*35*69



# FLOOD LIGHT

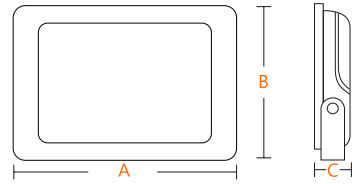

## PARAMETER


Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL010AL	AC85-265V	10	70	90	28	50	62*19.5*20.5
FLL020AL	AC85-265V	20	135	100	28	30	37*18.5*40
FLL030AL	AC85-265V	30	160	120	28	20	40*19.5*30
FLL050AL	AC85-265V	50	200	145	28	20	48*19.5*35
FLL100AL	AC85-265V	100	242	180	32	10	57*22*43
FLL150AL	AC85-265V	150	292	216	45	10	55*35*24.5
FLL200AL	AC85-265V	200	350	260	45	5	40.5*28.5*29

# FLOOD LIGHT

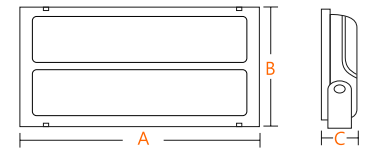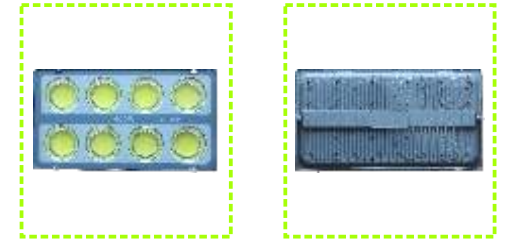


## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL100BE	AC85-265V	100	250	181	40	10	38*18*28
FLL200BE	AC85-265V	200	300	250	40	10	22*18*31
FLL300BE	AC85-265V	300	353	250	40	5	26.5*18*37
FLL400BE	AC85-265V	400	455	255	40	5	31.5*18*46



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL030BC	AC85-265V	30	180	130	30	20	38*18*28
FLL050BC	AC85-265V	50	180	130	30	10	22*18*31
FLL100BC	AC85-265V	100	250	180	30	10	26.5*18*37
FLL150BC	AC85-265V	150	300	260	30	10	31.5*18*46
FLL200BC	AC85-265V	200	340	260	30	5	35.5*18*27.5
FLL300BC	AC85-265V	300	420	300	30	5	43.5*17*31.5

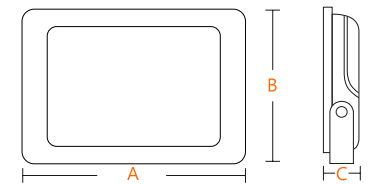


## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL050AJ	AC85-265V	50	240	220	80	10	46.5*45*26
FLL100AJ	AC85-265V	100	300	245	80	6	50*32*26.5
FLL150AJ	AC85-265V	150	366	305	80	1	38.5*21*32.5
FLL200AJ	AC85-265V	200	435	335	100	1	45.5*35.5*13
FLL300AJ	AC85-265V	300	520	365	100	1	54*38.5*13
FLL400AJ	AC85-265V	400	630	375	100	1	65*38.5*13
FLL500AJ	AC85-265V	500	740	375	100	1	76*39.5*13
FLL600AJ	AC85-265V	600	860	375	100	1	88*39.5*13




## FLOOD LIGHT



### PARAMETER


Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL030BD	AC85-265V	30	160	120	35	30	41*22*34.5
FLL050BD	AC85-265V	50	220	190	55	20	46.5*34.5*41.5
FLL100BD	AC85-265V	100	280	255	70	10	54.5*42*30
FLL200BD	AC85-265V	200	350	305	90	5	52*37*33
FLL300BD	AC85-265V	300	369	435	80	2	45.5*19.5*39
FLL400BD	AC85-265V	400	439	523	99	1	57.5*14.5*48.5

## HIGHBAY LIGHT




### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
HBL100D	AC85-265V	100	280	50	1	30*30*18
HBL150D	AC85-265V	150	380	55	1	40*40*18
HBL200D	AC85-265V	200	380	55	1	40*40*18
HBL250D	AC85-265V	250	480	60	1	50*50*18
HBL300D	AC85-265V	300	480	60	1	50*50*18





### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL030F	AC85-265V	30	224	230	55	20	23.2*6*25.5
FLL050F	AC85-265V	50	275	285	70	10	32*7.4*29
FLL100F	AC85-265V	100	305	285	85	5	29.5*9*34
FLL150F	AC85-265V	150	355	326	88	4	33.5*9.5*39
FLL200F	AC85-265V	200	355	326	88	4	33.5*9.5*39




### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
HBL050C	AC85-265V	50	250	48	1	26*26*15.5
HBL100C	AC85-265V	100	300	53	1	31*31*15.5
HBL150C	AC85-265V	150	350	53	1	36*36*15.5

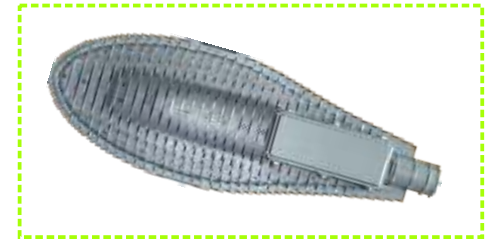



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST050C	AC85-265V	50	500	230	80	1	55*28*13
ST100C	AC85-265V	100	720	280	80	1	78*33*13
ST150C	AC85-265V	150	860	330	80	1	90*38*13
ST200C	AC85-265V	200	950	350	80	1	100*40*13
ST250C	AC85-265V	250	1100	360	80	1	115*41*13



## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST100N	AC85-265V	100	420	280	150	1	43.5*29.5*12
ST150N	AC85-265V	150	500	280	150	1	51.5*29.5*12
ST200N	AC85-265V	200	580	280	150	1	59.5*29.5*12
ST250N	AC85-265V	250	660	280	150	1	67.5*29.5*12

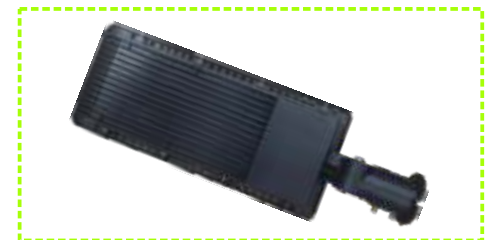

## PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST030Y	AC85-265V	30	260	123	50	20	65*41*42
ST050Y	AC85-265V	50	345	153	50	10	49*47.5*33
ST100Y	AC85-265V	100	410	173	50	8	56*38*39.5
ST150Y	AC85-265V	150	470	195	50	8	43*42*62



SFL100B

SFL025A



Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SFL025B	POLY 6V/9W	5000MAH	Timing remote control+ light control	12HOUR
SFL040B	POLY 6V/13W	10000MAH	Timing remote control+ light control	12HOUR
SFL060B	POLY 6V/18W	15000MAH	Timing remote control+ light control	12HOUR
SFL100B	POLY 6V/27W	20000MAH	Timing remote control+ light control	12HOUR
SFL200B	POLY 6V/36W	30000MAH	Timing remote control+ light control	12HOUR
SFL025A	POLY 6V/9W	5000MAH	Timing remote control+ light control	12HOUR
SFL040A	POLY 6V/13W	10000MAH	Timing remote control+ light control	12HOUR
SFL060A	POLY 6V/18W	15000MAH	Timing remote control+ light control	12HOUR
SFL100A	POLY 6V/27W	20000MAH	Timing remote control+ light control	12HOUR
SFL200A	POLY 6V/36W	30000MAH	Timing remote control+ light control	12HOUR



20W SST020C    40W SST040C    60W SST060C    20W SST020A    40W SST040A    60W SST060A



Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SST020C	POLY 6V/6W	5000MAH	Motion sensor+light control	12HOUR
SST040C	POLY 6V/9W	10000MAH	Motion sensor+light control	12HOUR
SST060C	POLY 6V/12W	15000MAH	Motion sensor+light control	12HOUR
SST020A	POLY 6V/6W	5000MAH	Motion sensor+light control	12HOUR
SST040A	POLY 6V/9W	10000MAH	Motion sensor+light control	12HOUR
SST060A	POLY 6V/12W	15000MAH	Motion sensor+light control	12HOUR



## PARAMETER

Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SST060B-60W	POLY 6V/15W	15000MAH	Timing remote control+ light control	12HOUR
SST100B-100W	POLY 6V/25W	20000MAH	Timing remote control+ light control	12HOUR



## PARAMETER

Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
ST015V-15W	MONO 18V/30W	12V 6MAH	Motion sensor+Timing control +light control	12HOUR
ST020V-20W	MONO 18V/40W	12V 16MAH	Motion sensor+Timing control +light control	12HOUR
ST030V-30W	MONO 18V/55W	12V 18MAH	Motion sensor+Timing control +light control	12HOUR
ST040V-40W	MONO 18V/65W	12V 32MAH	Motion sensor+Timing control +light control	12HOUR
ST050V-50W	MONO 18V/80W	12V 38MAH	Motion sensor+Timing control +light control	12HOUR
ST060V-60W	MONO 18V/90W	12V 42MAH	Motion sensor+Timing control +light control	12HOUR
ST080V-80W	MONO 18V/90W	12V 50MAH	Motion sensor+Timing control +light control	12HOUR
ST100V-100W	MONO 18V/100W	12V 54MAH	Motion sensor+Timing control +light control	12HOUR
ST120V-120W	MONO 18V/110W	12V 60MAH	Motion sensor+Timing control +light control	12HOUR



SEL002B



SEL004D



SEL005E



SEL006F

Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SEL002B	POLY 6V/0.65W	1*3.7V 800MAH	Motion sensor +Time control +Light control	MAX:10Hrs
SEL004D	POLY 6V/0.65W	1*3.7V 800MAH	Motion sensor +Time control +Light control	MAX:10Hrs
SEL005E	POLY 6V/0.55W	1*3.7V 800MAH	Motion sensor +Time control +Light control	MAX:10Hrs
SEL006F	POLY 6V/1.3W	1*3.7V 1500MAH	Motion sensor +Time control +Light control	MAX:10Hrs



SEL007G



STL001A



SFL100C

Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SEL007G	POLY 5.5V/2.5W	1*3.7V 1800MAH	Motion sensor +Time control +Light control	MAX:10Hrs
STL001A	POLY 5.5V/2.5W	1*3.7V 3600MAH	Motion sensor +Time control +Light control	MAX:6Hrs
SFL100C	POLY 3.7V/6W	12000MAH	Timing remote control+ light control	MAX:8Hrs



SLL006



SLL002C



SLL002B



SLL001A

Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SLL006	POLY 3.7V/0.88W	1*3.7V 1200MAH	Light control	MAX:4Hrs
SLL002B	POLY 5.5V/1W	1*3.7V 1800MAH	Light control	MAX:10Hrs
SLL002C	POLY 5.5V/1W	1*3.7V 1800MAH	Light control	MAX:10Hrs
SLL001A	POLY 5.5V/1.5W	1*3.7V 1800MAH	Motion sensor +Time control +Light control	MAX:10Hrs



**HY-SEL-001H**



**PARAMETER**

Item No.:HY-SEL-001H  
 Lamp Power:2.5W  
 Luminous Flux :260LM  
 Beam Angle:120°  
 Sensor Angle:120°  
 Solar Panel: 5V 3.0W  
 Li-ion Battery:3.7V 3200mAh  
 Working Time (fully charged): PIR SENSOR full-light by Sensed>4Hrs  
 Weak-light by energy-saving>24Hrs  
 Lamp Body Material:PC  
 Color:Black/White  
 Body Size:φ220mm\*21mm  
 Solar Panel Size:160\*160mm  
 Pillar Height:60cm/80cm  
 IP:IP54  
 Guarantee: 1year

**PARAMETER**

Item NO.:HY-SEL-002H  
 Lamp Power:3.0W  
 Luminous Flux :190LM  
 Beam Angle:120°  
 Sensor Angle:120°  
 Solar Panel: 5V 3.0W  
 Li-ion Battery:3.7V 3000mAh  
 Working Time (fully charged): PIR SENSOR full-light by Sensed>4Hrs  
 Weak-light by energy-saving>24Hrs  
 Lamp Body Material:PC  
 Color:Black/White  
 Body Size:φ220mm\*21mm  
 Solar Panel Size:160\*160mm  
 Pillar Height:60cm/80cm  
 IP:IP54  
 Guarantee: 1year

**HY-SEL-002H**



**HY-SEL-003H**



**PARAMETER**

Item NO.:HY-SEL-003H  
 Lamp Power:3.0W  
 Luminous Flux :190LM  
 Beam Angle:180°  
 Sensor Angle:180°  
 Solar Panel: 5V 3.0W  
 Li-ion Battery:3.7V 3000mAh  
 Working Time (fully charged): PIR SENSOR full-light by Sensed>4Hrs  
 Weak-light by energy-saving>24Hrs  
 Lamp Body Material:PC  
 Color:Black/White  
 Body Size:φ220mm\*21mm  
 Solar Panel Size:160\*160mm  
 Pillar Height:60cm/80cm  
 IP:IP54  
 Guarantee: 1year



**EML0006**

Input voltage:AC220-240V 50/60Hz  
 Light source:2x2W LED  
 Operation:DC  
 Battery:3.6V 1800mAh Ni-Cd  
 Emergency time:3/4/5 hours  
 Charging time:24hours  
 Material:Metal+Plastic  
 Protection level:IP20  
 Product size:270x87x262mm



**EML0007**

Input voltage:AC220-240V 50/60Hz  
 Light source:2x2W LED  
 Operation:DC  
 Battery:3.6V 1800mAh Ni-Cd  
 Emergency time:3/4/5 hours  
 Charging time:24hours  
 Material:Metal+Plastic  
 Protection level:IP20  
 Product size:270x87x305mm



**EML0008**

Input voltage:AC100-250V 50/60Hz  
 Light source:2x2W LED  
 Operation:DC  
 Battery:3.6V 1800mAh Ni-Cd  
 Emergency time:3-4 hours  
 Charging time:24hours  
 Material:Plastic  
 Protection level:IP20  
 Product size:300x140x90mm



**EML0005**

Input voltage:AC220-240V 50/60Hz  
 Light source:2x2W LED  
 Operation:DC  
 Battery:3.6V 1800mAh Ni-Cd  
 Emergency time:3/4/5 hours  
 Charging time:24hours  
 Material:Metal+Plastic  
 Protection level:IP20  
 Product size:375x25x198mm



**EML0002**

Input voltage:AC100-250V 50/60Hz  
 Light source:LED φ5 8pcs  
 Operation:AC/DC  
 Battery:3.6V 600mAh Ni-Cd  
 Emergency time:2/3/4 hours  
 Charging time:24hours  
 Material:Aluminium+Acrylic  
 Protection level:IP20  
 Product size:260x90x50mm



**EML0009/EML0010**

Input voltage:AC100-250V 50/60Hz  
 Light source:LED φ5 4pcs  
 Operation:AC/DC  
 Battery:3.6V 800mAh Ni-Cd  
 Emergency time:2-3 hours  
 Charging time:24hours  
 Material:metal+glass  
 Protection level:IP65



**Model: GBL03D**  
Power: 10pcs SMD 5730  
Size: 110x45mm/170x70mm  
Material: Stainless steel  
Voltage: AC85-265V  
IP65



**Model: GBL03E**  
Power: 10pcs SMD 5730  
Size: 110x45mm/170x70mm  
Material: Stainless steel  
Voltage: AC85-265V  
IP65



**Model: GBL03F**  
Power: 10pcs SMD 5730  
Size: 110x45mm/170x70mm  
Material: Stainless steel  
Voltage: AC85-265V  
IP65



**Model: GBL03G/H**  
Power: 4pcs SMD 5730  
Size: 85x85mm  
Material: Stainless steel  
Voltage: AC85-265V  
IP65



**Model: GAH0010**  
Power: 3W COB  
Size: 85x85mm  
Material: Aluminium  
Voltage: AC85-265V  
IP65



**Model: GAH0012**  
Power: 6W 6LED  
Size: 250x70mm  
Material: Aluminium  
Voltage: AC85-265V  
IP65



**Model: GBL03J**  
Power: 5/7/10/20/30W  
Material: Aluminium+Stainless steel  
Voltage: AC85-265V  
IP65



**Model: GBL03C**  
Power: 3w  
Size: Φ100mm  
Material: Aluminium  
Voltage: AC85-265V  
IP65



**Model: HYL-3W-D17A**  
Power: 3W  
Size: Φ40xW52xH240  
Lumen: 200Lm  
IP66  
Voltage: AC220-240V  
RA>80  
CCT: 3000K/4000K/6500K  
PF>0.5  
Beam angle: 38°  
Life span: ≥25000hrs  
Certification: CE



**Model: HYL-3W-S17A**  
Power: 2\*3W  
Size: Φ40xW135xH280  
Lumen: 2\*200Lm  
IP66  
Voltage: AC220-240V  
RA>80  
CCT: 3000K/4000K/6500K  
PF>0.5  
Beam angle: 38°  
Life span: ≥25000hrs  
Certification: CE



**Model: HYL-5W-D17B**  
Power: 5W  
Size: Φ50xW65xH310  
Lumen: 360Lm  
IP65  
Voltage: AC220-240V  
RA>80  
CCT: 3000K/4000K/6500K  
PF>0.5  
Beam angle: 30°  
Life span: ≥25000hrs  
Certification: CE



**Model: HYL-5W-S17B**  
Power: 2\*5W  
Size: Φ50xW135xH310  
Lumen: 2\*360Lm  
IP65  
Voltage: AC220-240V  
RA>80  
CCT: 3000K/4000K/6500K  
PF>0.5  
Beam angle: 30°  
Life span: ≥25000hrs  
Certification: CE



**Model: HYL-5W-D17A**  
Power: 5W  
Size: Φ50xWΦ75xH150  
Lumen: 360Lm  
IP65  
Voltage: AC220-240V  
RA>80  
CCT: 3000K/4000K/6500K  
PF>0.5  
Beam angle: 30°  
Life span: ≥25000hrs  
Certification: CE



**Model: HYL-5W-S17A**  
Power: 2\*5W  
Size: Φ50xWΦ115xH150  
Lumen: 2\*360Lm  
IP65  
Voltage: AC220-240V  
RA>80  
CCT: 3000K/4000K/6500K  
PF>0.5  
Beam angle: 30°  
Life span: ≥25000hrs  
Certification: CE



**Model: HYL-5W-S17A-SE**  
Power: 2\*5W  
Size: Φ50xWΦ115xH150  
Lumen: 2\*360Lm  
IP44  
Voltage: AC220-240V  
RA>80  
CCT: 3000K/4000K/6500K  
PF>0.5  
Beam angle: 30°  
Sensor angle: 120°  
Sensor distance: 0-8m  
Life span: ≥25000hrs  
Certification: CE