

رؤية VISION

2030

المملكة العربية السعودية
KINGDOM OF SAUDI ARABIA

HYLEED

HYUMEN[®]
Light Up your World

HYLEED

HYUMEN[®]
Light Up your World

رؤية VISION
2030

المملكة العربية السعودية
KINGDOM OF SAUDI ARABIA



CB CE ERP




2019-2020

Ningbo Everrising Intelligent Technology Co.,Ltd is a comprehensive enterprise focused on smart home supporting products and professional indoor & outdoor LED lighting's development, design, production, sales, and provided a full range of intelligent home products customized solutions, production and after-sales service.

Ningbo Everrising Intelligent Technology Co.,Ltd was set up in 2010 , which covers an area of 10000 square meters. It has more than 300 employees. One research and development center has been built which includes over 60 engineers and technicians who are engaged in light analysis, optical design, thermal design and circuit-driven design, and has introduced 77 units various types of advanced machinery and equipments. Now we have over 30 all kinds product patents. We also has established advanced products laboratory, quality testing room to ensure and enhance the quality of the company's products.

We engaged in providing high-quality and good-performance LED products and solution for all customers including professional channel customers and terminal customers.


Ningbo Everrising Intelligent Technology Co.,Ltd advocated international, standard and scientized management, adhere to the “quality first, customer supreme” the management objective. Integrity, responsibility, innovation, mutual benefits is our core values. We will adhere to bring forth new ideas in the business philosophy, brand building, product development and business models in the future, to provide customers with intelligent, comfortable, safe, green, environmentally friendly lighting products, our company will always dedicate to be both the promoter and leader in LED Energy-efficient lighting technology in China.

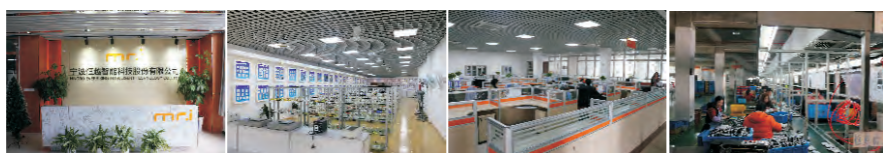

HYLEED


▶ LIGHT SOURCE	1-6
▶ TUBE & FITTING	7-8
▶ STRIP LIGHT	9-10
▶ PURIFIED LAMP	11
▶ DOWN LIGHT	12-14
▶ PANEL LIGHT	15-22
▶ FLOOD LIGHT	23-26
▶ HIGHBAY LIGHT	26-27
▶ STREET LIGHT	27-29
▶ SOLAR SERIES	30-33
▶ EMERGENCY LIGHT	34
▶ GARDEN LIGHT	35-36





Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T10030A	AC85-265V	30	100	185	50	53*53*40
T12040A	AC85-265V	40	120	225	30	62.5*38*48
T14050A	AC85-265V	50	140	240	30	72.5*43.5*50
T15070A	AC85-265V	70	150	275	20	78*32*57


★ ALUMINIUM




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T5005C	AC85-265V	5	50	95	100	52.5*27*22
T6010C	AC85-265V	10	60	115	100	62.5*32*25
T7015C	AC85-265V	15	70	130	60	44*37*28.5
T8018C	AC85-265V	20	80	145	30	42*34*31
T10028C	AC85-265V	30	100	165	20	52*32*36
T12038C	AC85-265V	40	120	205	20	60*25*41
T13550C	AC85-265V	50	135	210	20	68.5*28*48




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T11550H	AC85-265V	50	117		30	63*38*51
T150100H	AC85-265V	100	152		20	79.5*33*60
T165150H	AC85-265V	150	167		20	70*36*60
T185200H	AC85-265V	200	187		16	78*40*67



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T14050P	AC85-265V	50	140		20	77*31.5*44
T17080P	AC85-265V	80	170		20	89.5*36.5*49
T190100P	AC85-265V	100	190		10	97*39.5*29
T230150P	AC85-265V	150	230		8	49*49*58



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX6005E	AC85-265V	5	60	107	100	64*33*25.5
YX7010E	AC85-265V	10	72	122	100	42*42*58
YX8515E	AC85-265V	15	84	137	50	49.5*49.5*33.5
YX9520E	AC85-265V	20	96	157	50	52*52*36.5
YX12030E	AC85-265V	30	120	188	30	69.5*42.5*44




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T5005X	AC85-265V	5	50	103	100	52.5*27*22.5
T6010X	AC85-265V	10	60	117	100	62.5*32*25.5
T7015X	AC85-265V	15	70	132	100	72.5*37*28.5
T8020X	AC85-265V	20	80	147	100	82.5*42*31.5
T10030X	AC85-265V	30	100	175	50	52*52*37
T11540X	AC85-265V	40	115	200	30	59.5*36.5*42
T12550X	AC85-265V	50	125	215	30	64.5*26.5*45

LIGHT SOURCE


LIGHT SOURCE



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T4007L	AC85-265V	7	40	117	200	43*43*25.5
T4009L	AC85-265V	9	40	138	100	43*22*29
T5012L	AC85-265V	12	50	175	100	53*27*36.5
T5018L	AC85-265V	18	50	175	100	53*27*36.5
T6024L	AC85-265V	24	60	190	50	61*31*21



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T3707T	AC85-265V	7	37	104	100	39*20.5*24.5
T3709T	AC85-265V	9	37	115	100	39*20.5*25
T4412T	AC85-265V	12	44	139	100	48*25*29
T5015T	AC85-265V	15	50	145	100	53*27.5*31.5




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
C3703A	AC85-265V	3	37	100	200	43.5*22.5*44
C3705A	AC85-265V	5	37	120	200	43.5*22.5*50
A5507B	AC85-265V	7	55	105	100	31.5*31.5*48.5
A6009B	AC85-265V	9	60	110	100	35.5*35.5*54.4
A6012B	AC85-265V	12	60	120	100	35.5*35.5*58.5
A7015B	AC85-265V	15	70	130	100	37.5*37.5*56.5
A8018B	AC85-265V	18	80	140	100	42.5*42.5*60




YX050X



YX040G



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX040G	AC85-265V	36	80	245	50	54*42*42
YX050X	AC85-265V	48	101	243	30	51.5*32*52.5



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX9312D	AC85-265V	12	93	80	100	47*47*38
YX12018D	AC85-265V	18	120	84	50	69.5*44.5*29.5
YX15024D	AC85-265V	24	150	88	30	50*48*32
YX18536D	AC85-265V	36	185	95	30	55*58*40
YX22050D	AC85-265V	48	220	100	20	58*46*46.5




LC05GU10S




LC05G5.3C


LC05G5.3E




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
LC05G5.3C	AC85-265V	5/7	50	55	100	27*27*24
LC05G5.3S	AC85-265V	5/7	50	55	100	27*27*24
LC05G5.3E	AC85-265V	5/7	50	55	100	27*27*24



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YUL007A	AC85-265V	7	40	131	100	47*24*32
YUL009A	AC85-265V	9	40	140	100	47*24*32
YUL012A	AC85-265V	12	53	175	100	59*30*39.5
YUL016A	AC85-265V	16	125	260	100	64*32.5*39




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YSL007A	AC85-265V	7	40	120	100	54*27.5*28
YSL009A	AC85-265V	9	40	130	100	54*27.5*28
YSL012A	AC85-265V	12	61	150	100	66.5*27.5*28




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
C3504C	AC220-240V	4	35	118	100	42.5*22*28
G4506B	AC220-240V	6	45	81	100	58*30*21.6
A6008C	AC220-240V	8	60	103	100	68*35*26.5


G4506B



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX9504J	AC220-240V	4	95	138	50	66*66*31.5
YX9506J	AC220-240V	6	95	138	50	66*66*31.5
YX9508J	AC220-240V	8	95	138	50	66*66*31.5



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
G8004S	AC220-240V	4	80	118	50	45.5*45.5*26.5
G9506S	AC220-240V	6	95	138	50	66*66*31.5
G12508S	AC220-240V	8	125	170	50	66*66*31.5



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
YX6406H	AC220-240V	4	64	140	100	69*35.5*32
YX6406H	AC220-240V	6	64	140	100	69*35.5*32
YX6406H	AC220-240V	8	64	140	100	69*35.5*32





TF1060B



TF2060B

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
TF1060B	/	/	600	33	30	63.5*17.3*16.3
TF1120B	/	/	1200	33	30	123.5*17.3*16.3
TF2060B	/	/	600	33	30	63.5*17.3*16.3
TF2120B	/	/	1200	33	30	123.5*17.3*16.3




TF1060A



TF1060D

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
TF1060D/A	/	/	600	33/40	30	63.5*17.3*16.3
TF1120D/A	/	/	1200	33/40	30	123.5*17.3*16.3
TF2060D/A	/	/	600	33/40	30	63.5*17.3*16.3
TF2120D/A	/	/	1200	33/40	30	123.5*17.3*16.3

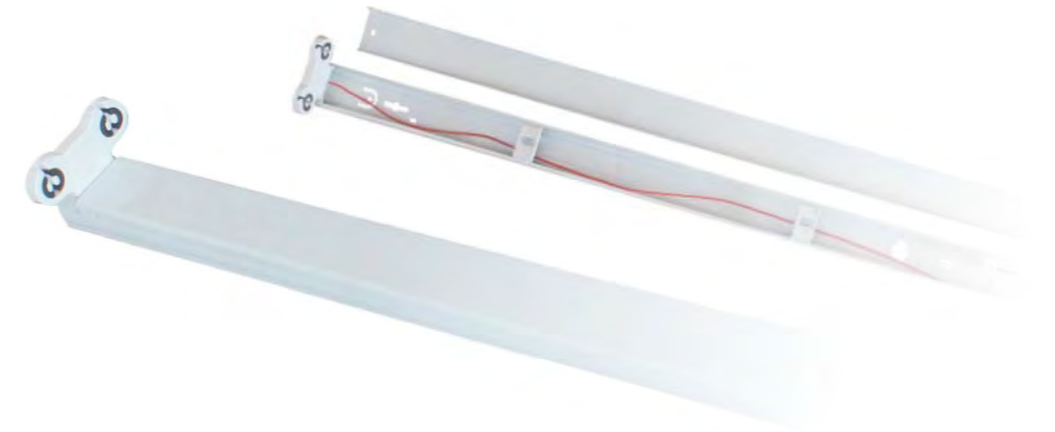

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
TF1060F	/	/	600	40	30	64*21.5*15.5
TF1120F	/	/	600	40	30	64*21.5*15.5
TF2060F	/	/	1200	40	30	124*21.5*15.5
TF2120F	/	/	1200	40	30	124*21.5*15.5

ALUMINIUM



PLASTIC


Model	Voltage	Power (w)	Lumen	Dimension(mm)		Packing	
				A	B	PCS/CTN	CARTON(cm)
TL0809F/H	AC85-265V	9	600lm	600	26	30	64.5*21*18
TL0810F/H	AC85-265V	10	800lm	600	26	30	64.5*21*18
TL0810F/H	AC85-265V	10	900lm	600	26	30	64.5*21*18
TL0813F/H	AC85-265V	13	1250lm	600	26	30	64.5*21*18
TL0818F/H	AC85-265V	18	1200lm	1200	26	30	124.5*21*18
TL0820F/H	AC85-265V	20	1600lm	1200	26	30	124.5*21*18
TL0820F/H	AC85-265V	20	1800lm	1200	26	30	124.5*21*18
TL0825F/H	AC85-265V	25	2300lm	1200	26	30	124.5*21*18




Model	Voltage	Ship Power (w)	Dimension(mm)		Packing	
			A	M/CTN	CARTON(cm)	
SPH2835D180B	AC230V	0.1	12	50	32*32*15	
SPH2835D180B	AC230V	0.1	12	50	32*32*15	



Model	Voltage	Power (w)	Width (mm)	Packing	
				M/CTN	CARTON(cm)
SPH5050D60C	AC230V	0.5	10	50	31*31*11.2
SPH5050D96C	AC230V	0.5	12	50	32*32*15
SPH5050D120C	AC230V	0.5	12	50	32*32*15

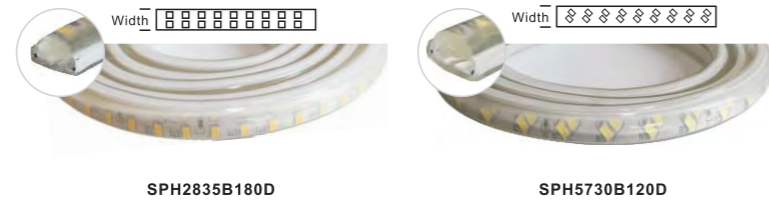


Model	Voltage	Power (w)	Width (mm)	Packing	
				M/CTN	CARTON(cm)
SPH5730B120D	AC230V	0.3/0.5	12	50	33*33*15
SPH2835B180D	AC230V	0.1/0.2	12	50	33*33*15

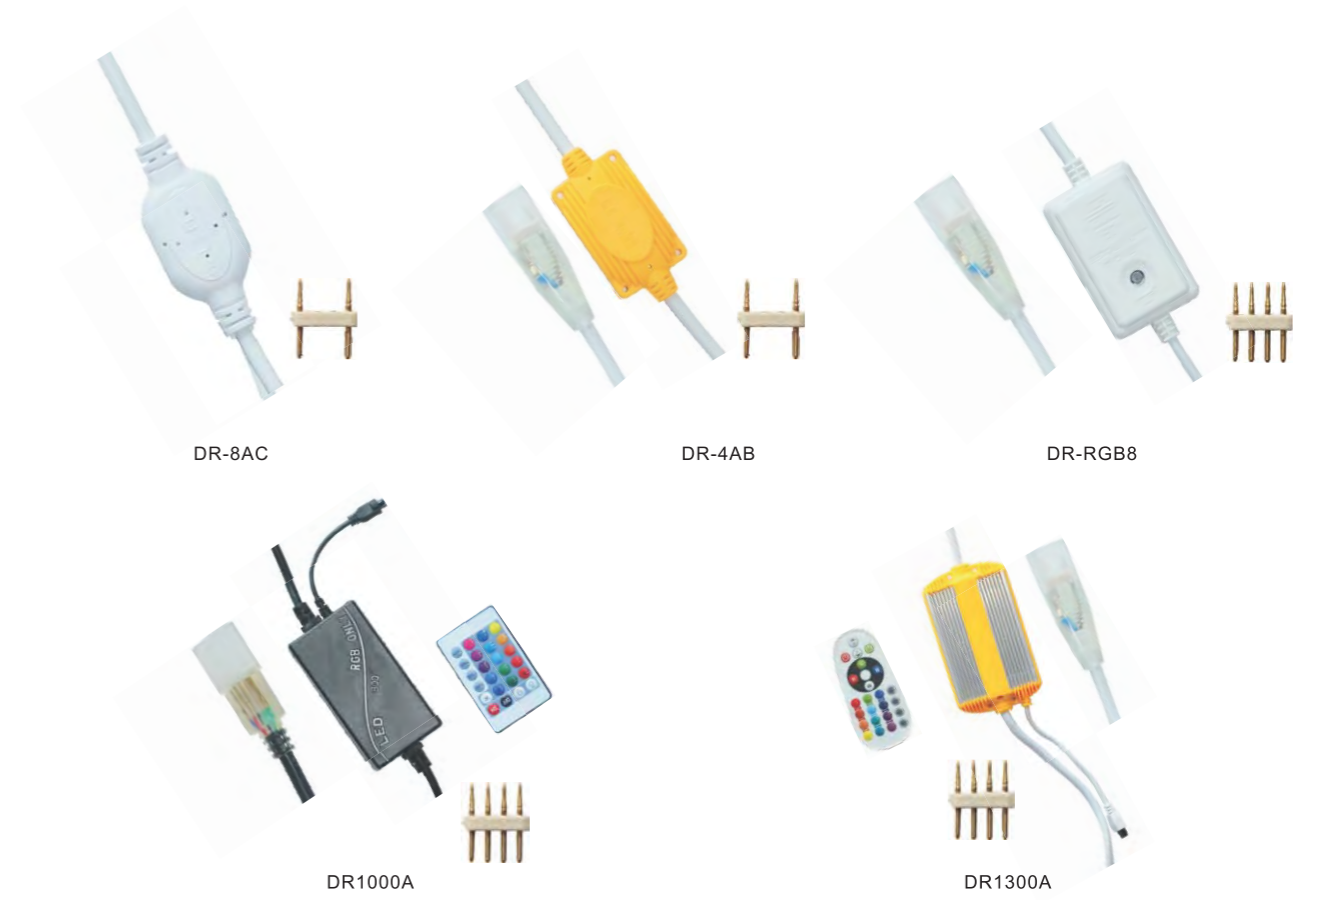

STRIP LIGHT


STRIP LIGHT

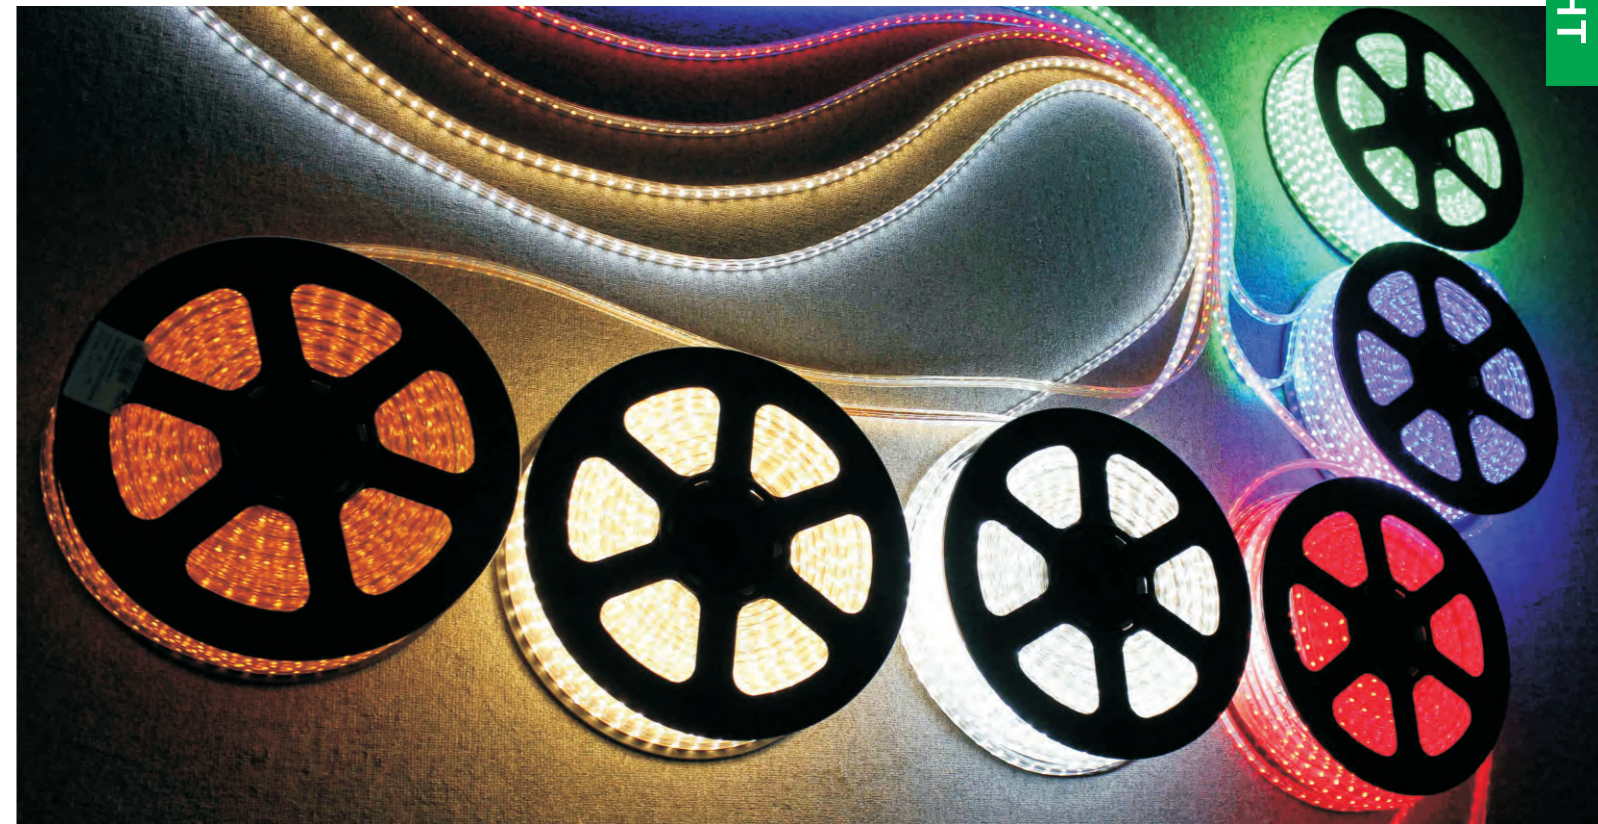




PFL018K

Model	Voltage	Power (w)	Length(mm)	Packing	
				PCS/CTN	CARTON(cm)
PFL020A	AC175-265V	20	600	20	65*27*17
PFL040A	AC175-265V	40	1200	20	125*27*17
PFL018K	AC175-265V	18	600	30	62*28*18.5
PFL036K	AC175-265V	36	1200	30	122*28*18.5

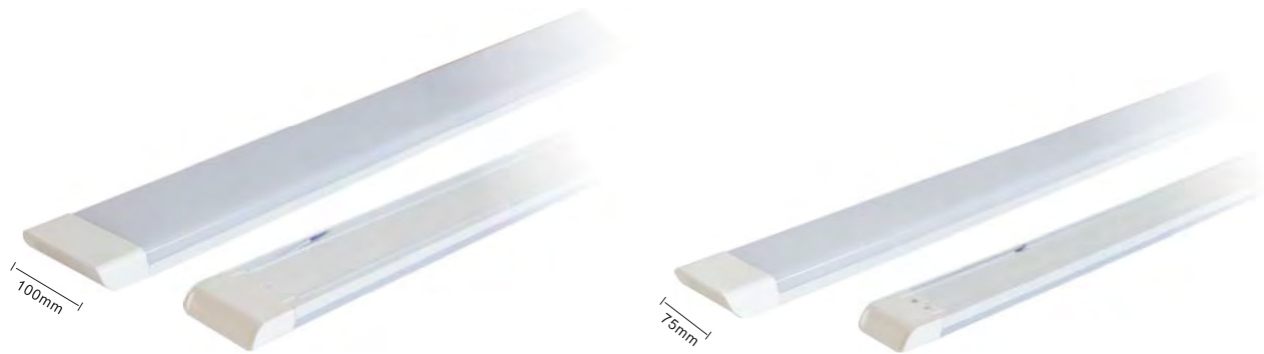


Model	Voltage	Power (w)	Length(mm)	Packing	
				PCS/CTN	CARTON(cm)
PFL060A	AC85-265V	60	1200	20	125*27*17
PFL080A	AC85-265V	80	1200	20	125*37*17
PFL100A	AC85-265V	100	1200	20	125*37*17

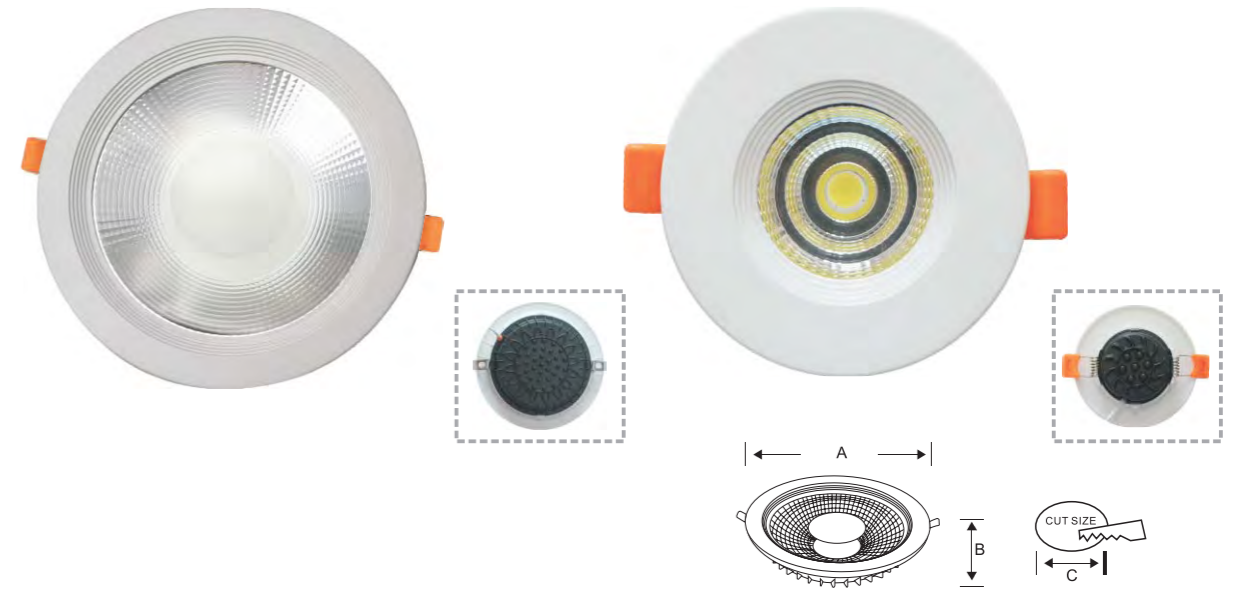

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL005A/007A	AC85-265V	5/7	93	47	70	100	52*24.4*42.5
DLL010A	AC85-265V	10	120	56	100	50	67*27*28.5
DLL015A	AC85-265V	15	160	58	140	40	53*36*36.5
DLL030A	AC85-265V	30	216	60	200	20	46*29.5*46.5




Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL007D	AC85-265V	7	88	54	70	100	49*29*41
DLL010D	AC85-265V	10	119	57	100	50	67*27*28.5
DLL015D	AC85-265V	15	173	51	150	40	52*37.5*38
DLL030D	AC85-265V	30	221	55	200	30	47.5*29*48

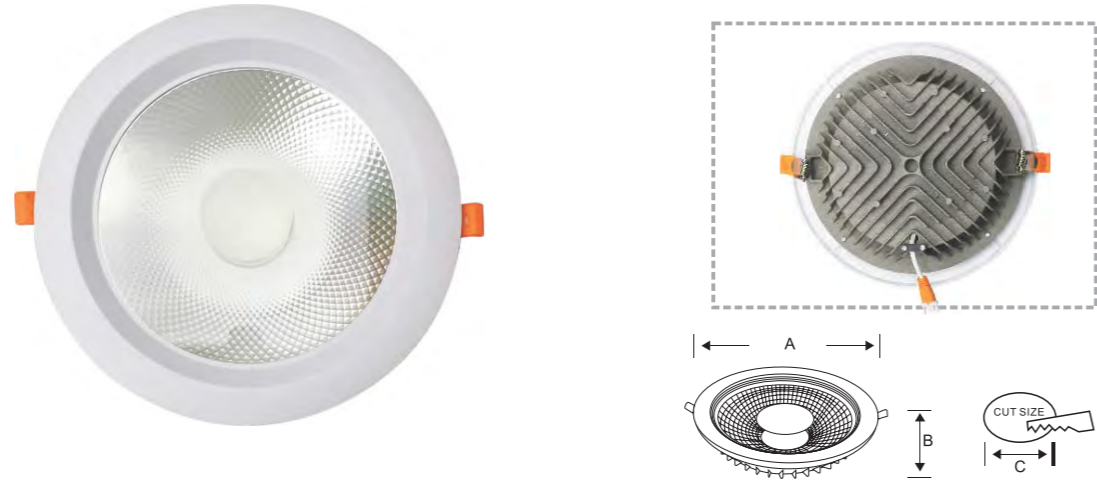

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL005B/007B	AC85-265V	5/7	88	43	70	100	54*29*44
DLL010B	AC85-265V	10	120	46	100	50	61.5*26.5*26
DLL015B	AC85-265V	15	160	59	140	40	66.5*36.5*37
DLL020B	AC85-265V	20	195	65	170	30	42*34.5*63
DLL030B	AC85-265V	30	224	70	200	20	49*37*50



Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL007X	AC85-265V	7	90	50	70	120	53*42*37
DLL010X	AC85-265V	10	90	50	70	120	53*42*37
DLL015X	AC85-265V	15	120	50	100	80	53*43.5*28.5
DLL022X	AC85-265V	22	170	50	150	40	58*36*39.5
DLL030X	AC85-265V	30	225	50	200	20	58*47.5*26

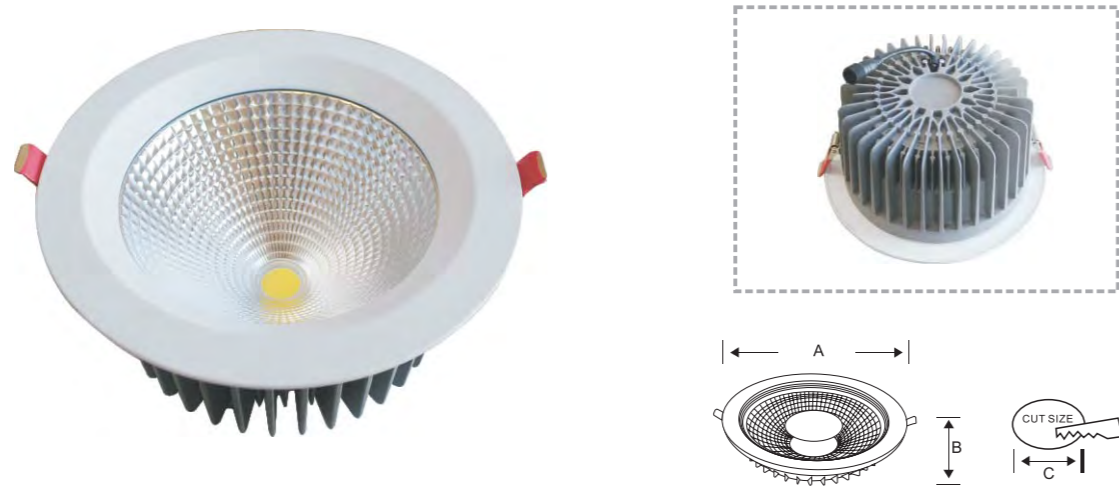

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
DLL060L	AC85-265V	60	230	110	200	10	59.5*26.5*51.5
DLL080D	AC85-265V	80	230	110	200	10	59.5*26.5*51.5



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
DLL015F	AC85-265V	15	167	40	40	57.5*37.5*38
DLL030F	AC85-265V	30	220	40	20	47*27*47.5
DLL040F	AC85-265V	40	300	40	10	63*32.5*33.5

DOWN LIGHT


DOWN LIGHT



PLL003BR



PLL003BS




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	C	PCS/CTN	CARTON(cm)
PLL003BR/S	AC85-265V	3	85	70	100	57.5*27.5*30
PLL006BR/S	AC85-265V	6	120	105	60	44*27.5*35
PLL012BR/S	AC85-265V	12	160	140	40	41*27.5*46
PLL018BR/S	AC85-265V	18	220	200	40	52*25*53.5
PLL024BR/S	AC85-265V	24	300	285	20	53*33.5*34.5



PLL006AR




PLL006AS




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL006AR/S	AC85-265V	6	120	32	60	44*27.5*35
PLL012AR/S	AC85-265V	12	160	32	40	41*27.5*46
PLL018AR/S	AC85-265V	18	220	32	40	52*25*53.5
PLL024AR/S	AC85-265V	24	300	32	20	53*33.5*34.5

NEW Design



Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL016AJR	AC85-265V	16	120	30	70	60	40.5*39.5*27.5
PLL024AJR	AC85-265V	24	170	30	100	60	55.5*39.5*37.5
PLL032AJR	AC85-265V	32	225	30	100	40	47.5*39.5*47.5


NEW Design



Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL016AJS	AC85-265V	16	120	30	70	60	40.5*39.5*27.5
PLL024AJS	AC85-265V	24	170	30	100	60	55.5*39.5*37.5
PLL032AJS	AC85-265V	32	225	30	100	40	47.5*39.5*47.5




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL008AGR	AC85-265V	8	100	30	45	32.2*32.2*15
PLL012AGR	AC85-265V	12	130	30	45	41.5*41.5*15
PLL018AGR	AC85-265V	18	185	30	32	38*38*24.7
PLL022AGR	AC85-265V	22	225	30	24	45.6*45.6*20



Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL008AFR	AC85-265V	8	100	25	70	45	32.2*32.2*15
PLL012AFR	AC85-265V	12	130	25	100	45	41.5*41.5*15
PLL018AFR	AC85-265V	18	185	25	160	32	38*38*24.7
PLL022AFR	AC85-265V	22	225	25	200	24	45.6*45.6*20



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL012AGS	AC85-265V	12	130	30	45	41.5*41.5*18.5
PLL018AGS	AC85-265V	18	185	30	32	38*38*28.7
PLL022AGS	AC85-265V	22	220	30	24	45.6*45.6*22



Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL008AFS	AC85-265V	8	100	25	70	45	32.5*32.5*15
PLL012AFS	AC85-265V	12	130	25	100	45	41.5*41.5*18.5
PLL018AFS	AC85-265V	18	185	25	160	32	38*38*28.7
PLL022AFS	AC85-265V	22	225	25	200	24	45.6*45.6*22




Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
PLL010YR/S	AC85-265V	10	85	28	70	100	69*25*28.5
PLL018YR/S	AC85-265V	18	120	28	100	50	84*25*33.5
PLL024YR/S	AC85-265V	24	170	28	150	30	53.5*47*23.5
PLL036YR/S	AC85-265V	36	225	28	200	20	47*47*28.5



Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL024QR	AC85-265V	24	220	58	20	46.5*35*52
PLL036QR	AC85-265V	36	300	58	10	63*45*32.5

PANEL LIGHT

PANEL LIGHT

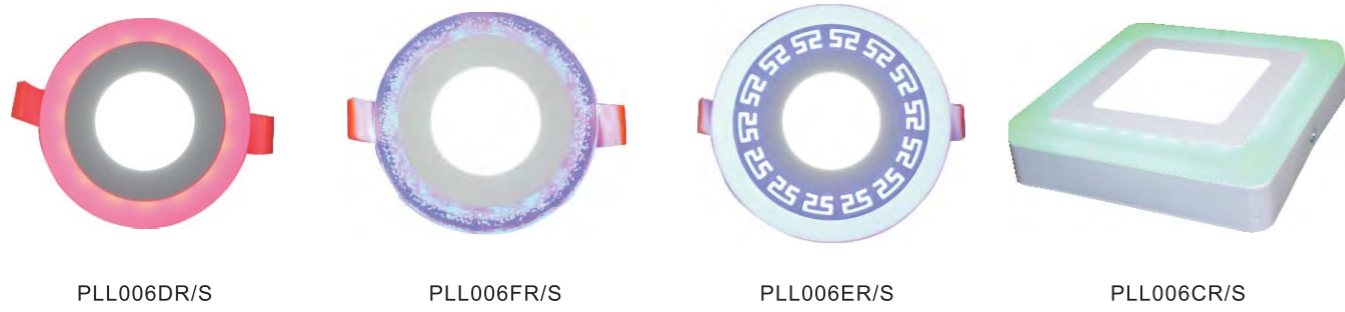

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL006C/D/E/F	AC85-265V	3+3	105	75	100	67*43.5*27.5
PLL009C/D/E/F	AC85-265V	6+3	145	105	50	84.4*22*34.5
PLL016C/D/E/F	AC85-265V	12+4	195	155	30	64.5*43.5*22.5
PLL024C/D/E/F	AC85-265V	18+6	245	210	20	54.5*43.5*28



Model	Voltage	Power (w)	Dimension(mm)		Packing		
			A	B	PCS/CTN	CARTON(cm)	
GLL015A	AC85-265V	15	210	110	65	40	41.5*31*57
GLL020A	AC85-265V	20	270	145	75	20	49*37.5*44
GLL015B	AC85-265V	15	160	65		40	69*36*35.5
GLL020B	AC85-265V	20	225	75		20	46.5*40*46
GLL015C	AC85-265V	15	160	160	65	40	69*36*35.5
GLL020C	AC85-265V	20	225	225	75	20	46.5*40*46



Model	Voltage	Power (w)	Dimension(mm)	Packing	
				PCS/CTN	CARTON(cm)
PLL060V	AC85-265V	36	595*595	4	61.5*9.5*61.5
PLL048V	AC85-265V	48	595*595	4	61.5*9.5*61.5



Model	Voltage	Power (w)	Dimension(mm)	Packing	
				PCS/CTN	CARTON(cm)
PLL072X	AC85-265V	72	595*595	10	62*32*62.5
PLL096X	AC85-265V	96	595*595	10	62*32*62.5
PLL120X	AC85-265V	120	595*595	10	62*32*62.5





Model	Voltage	Power (w)	Dimension(mm)	Packing	
				PCS/CTN	CARTON(cm)
GRL072D	AC85-265V	72	595*595	10	62*32*62.5
GRL100D	AC85-265V	100	595*595	10	62*32*62.5
GRL120D	AC85-265V	120	595*595	10	62*32*62.5






Model	Voltage	Power (w)	Dimension(mm)	Packing	
				PCS/CTN	CARTON(cm)
PLL072AK	AC85-265V	72	595*595	10	62*32*62.5
PLL096AK	AC85-265V	96	595*595	10	62*32*62.5
PLL120AK	AC85-265V	120	595*595	10	62*32*62.5

PANEL LIGHT


PANEL LIGHT

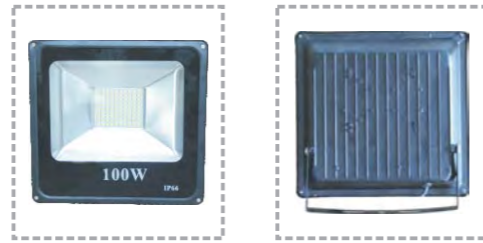



Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL050R	AC85-265V	50	230	280	55	10	50*34*31
FLL100R	AC85-265V	100	280	300	60	10	60.5*37.5*32.5
FLL150R	AC85-265V	150	280	300	60	5	37.5*30.5*32.5
FLL200R	AC85-265V	200	280	300	85	5	50*30.5*33

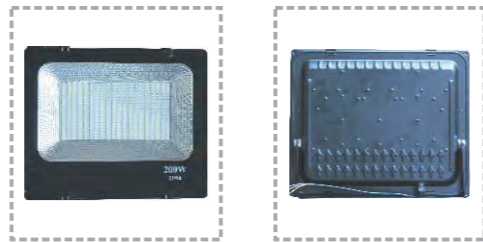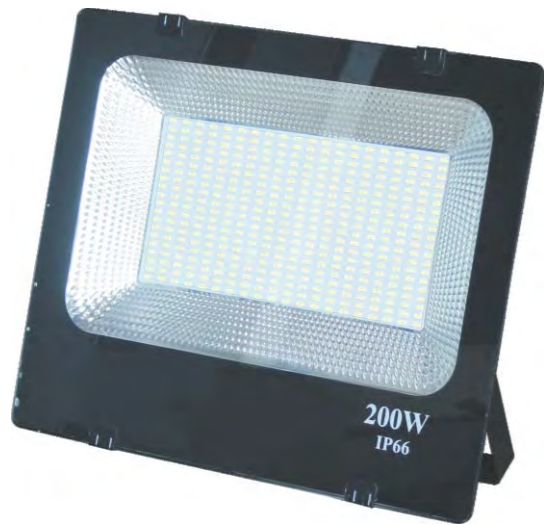

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL050AR	AC85-265V	50	250	225	40	30	55*39*24.5
FLL100AR	AC85-265V	100	285	275	43	20	48.5*37*30
FLL150AR	AC85-265V	150	340	345	50	15	62*29.5*36.5
FLL200AR	AC85-265V	200	340	345	50	15	62*29.5*36.5
FLL300AR	AC85-265V	300	410	415	55	5	63.5*43.5*44.5
FLL400AR	AC85-265V	400	410	415	55	5	63.5*43.5*44.5

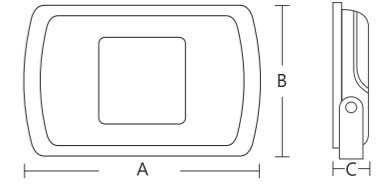


Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL050BF	AC85-265V	50	230	183	65	10	38*34*24.5
FLL100BF	AC85-265V	100	270	215	65	10	44*34*28.5
FLL200BF	AC85-265V	200	358	293	65	5	34*30.5*37
FLL300BF	AC85-265V	300	420	325	68	1	43*33.5*69
FLL400BF	AC85-265V	400	530	338	68	1	54*35*69

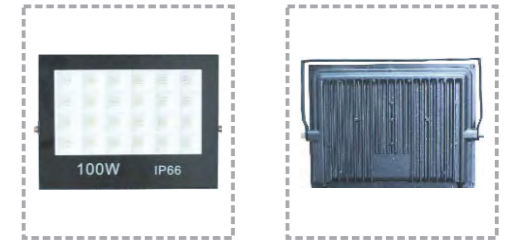



Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL030BC	AC85-265V	30	180	130	30	20	38*18*28
FLL050BC	AC85-265V	50	180	130	30	10	22*18*31
FLL100BC	AC85-265V	100	250	180	30	10	26.5*18*37
FLL150BC	AC85-265V	150	300	260	30	10	31.5*18*46
FLL200BC	AC85-265V	200	340	260	30	5	35.5*18*27.5
FLL300BC	AC85-265V	300	420	300	30	5	43.5*17*31.5

FLOOD LIGHT



FLOOD LIGHT

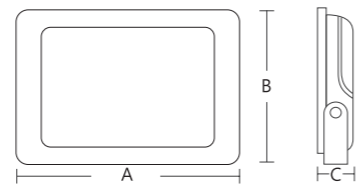


Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL050AJ	AC85-265V	50	240	220	80	10	46.5*45*26
FLL100AJ	AC85-265V	100	300	245	80	6	50*32*26.5
FLL150AJ	AC85-265V	150	366	305	80	1	38.5*21*32.5
FLL200AJ	AC85-265V	200	435	335	100	1	45.5*35.5*13
FLL300AJ	AC85-265V	300	520	365	100	1	54*38.5*13
FLL400AJ	AC85-265V	400	630	375	100	1	65*38.5*13
FLL500AJ	AC85-265V	500	740	375	100	1	76*39.5*13
FLL600AJ	AC85-265V	600	860	375	100	1	88*39.5*13

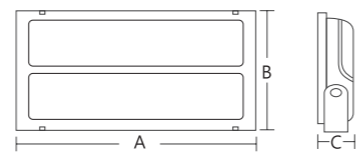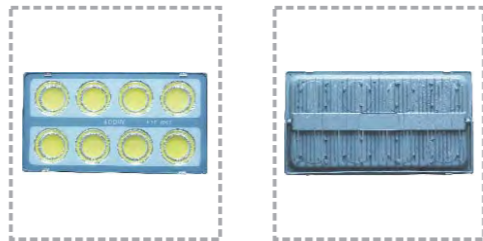


Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL100BE	AC85-265V	100	250	181	40	10	38*18*28
FLL200BE	AC85-265V	200	300	250	40	10	22*18*31
FLL300BE	AC85-265V	300	353	250	40	5	26.5*18*37
FLL400BE	AC85-265V	400	455	255	40	5	31.5*18*46




Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL030BD	AC85-265V	30	160	120	35	30	41*22*34.5
FLL050BD	AC85-265V	50	220	190	55	20	46.5*34.5*41.5
FLL100BD	AC85-265V	100	280	255	70	10	54.5*42*30
FLL200BD	AC85-265V	200	350	305	90	5	52*37*33
FLL300BD	AC85-265V	300	369	435	80	2	45.5*19.5*39
FLL400BD	AC85-265V	400	439	523	99	1	57.5*14.5*48.5




Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
HBL050C	AC85-265V	50	250	48	1	26*26*15.5
HBL100C	AC85-265V	100	300	53	1	31*31*15.5
HBL150C	AC85-265V	150	350	53	1	36*36*15.5





Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
HBL100D	AC85-265V	100	280	50	1	30*30*18
HBL150D	AC85-265V	150	380	55	1	40*40*18
HBL200D	AC85-265V	200	380	55	1	40*40*18
HBL250D	AC85-265V	250	480	60	1	50*50*18
HBL300D	AC85-265V	300	480	60	1	50*50*18





Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST100N	AC85-265V	100	420	280	150	1	43.5*29.5*12
ST150N	AC85-265V	150	500	280	150	1	51.5*29.5*12
ST200N	AC85-265V	200	580	280	150	1	59.5*29.5*12
ST250N	AC85-265V	250	660	280	150	1	67.5*29.5*12





Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST100D	AC85-265V	100	500	360	100	1	49.5*34*11
ST150D	AC85-265V	150	640	360	100	1	49.5*34*44
ST200D	AC85-265V	200	740	360	100	1	69.5*34*11
ST205D	AC85-265V	250	840	360	100	1	79.5*34*11
ST300D	AC85-265V	300	940	360	100	1	98.5*34*11

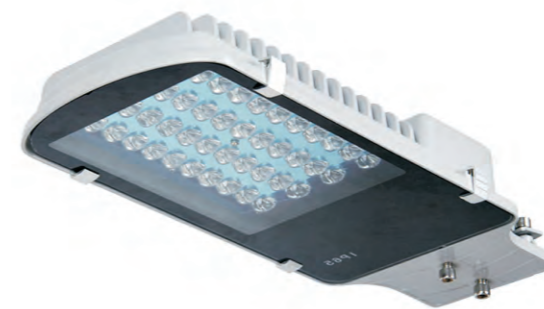

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST024E	AC85-265V	24	400	140	60	20	69.5*42*49.5
ST030E	AC85-265V	30	495	210	70	4	51*26*23
ST050E	AC85-265V	50	495	210	70	4	51*26*23
ST100E	AC85-265V	100	610	280	75	1	55*27*85
ST150E	AC85-265V	150	715	280	75	1	73*29*18.5

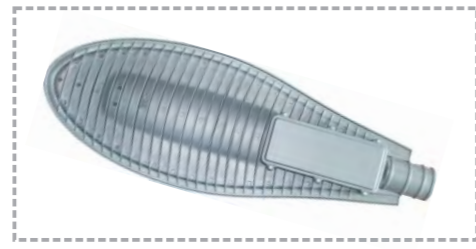

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST050C	AC85-265V	50	500	230	80	1	55*28*13
ST100C	AC85-265V	100	720	280	80	1	78*33*13
ST150C	AC85-265V	150	860	330	80	1	90*38*13
ST200C	AC85-265V	200	950	350	80	1	100*40*13
ST250C	AC85-265V	250	1100	360	80	1	115*41*13

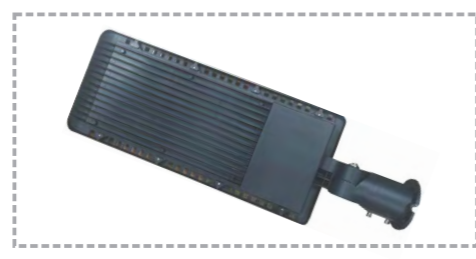

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
ST030Y	AC85-265V	30	260	123	50	20	65*41*42
ST050Y	AC85-265V	50	345	153	50	10	49*47.5*33
ST100Y	AC85-265V	100	410	173	50	8	56*38*39.5
ST150Y	AC85-265V	150	470	195	50	8	43*42*62

STREET LIGHT



SFL100B




SFL025A



SOLAR SERIES

Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SFL025B	POLY 6V/9W	5000MAH	Timing remote control+ light control	12HOUR
SFL040B	POLY 6V/13W	10000MAH	Timing remote control+ light control	12HOUR
SFL060B	POLY 6V/18W	15000MAH	Timing remote control+ light control	12HOUR
SFL100B	POLY 6V/27W	20000MAH	Timing remote control+ light control	12HOUR
SFL200B	POLY 6V/36W	30000MAH	Timing remote control+ light control	12HOUR
SFL025A	POLY 6V/9W	5000MAH	Timing remote control+ light control	12HOUR
SFL040A	POLY 6V/13W	10000MAH	Timing remote control+ light control	12HOUR
SFL060A	POLY 6V/18W	15000MAH	Timing remote control+ light control	12HOUR
SFL100A	POLY 6V/27W	20000MAH	Timing remote control+ light control	12HOUR
SFL200A	POLY 6V/36W	30000MAH	Timing remote control+ light control	12HOUR

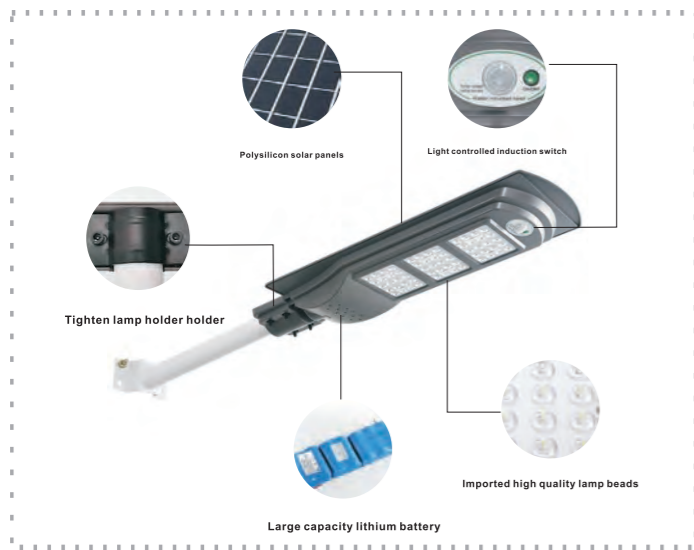

Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SST020C	POLY 6V/6W	5000MAH	Motion sensor+light control	12HOUR
SST040C	POLY 6V/9W	10000MAH	Motion sensor+light control	12HOUR
SST060C	POLY 6V/12W	15000MAH	Motion sensor+light control	12HOUR
SST020A	POLY 6V/6W	5000MAH	Motion sensor+light control	12HOUR
SST040A	POLY 6V/9W	10000MAH	Motion sensor+light control	12HOUR
SST060A	POLY 6V/12W	15000MAH	Motion sensor+light control	12HOUR
SST080D-80W	POLY 6V/10W	10000MAH	Motion sensor+light control	12HOUR
SST120D-120W	POLY 6V/15W	15000MAH	Motion sensor+light control	12HOUR



Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
SST060B-60W	POLY 6V/15W	15000MAH	Timing remote control+ light control	12HOUR
SST100B-100W	POLY 6V/25W	20000MAH	Timing remote control+ light control	12HOUR



Model	Solar Panel	Battery Capacity	Control Mode	Discharging Time
ST015V-15W	MONO 18V/30W	12V 6AH	Motion sensor+Timing control +light control	12HOUR
ST020V-20W	MONO 18V/40W	12V 16AH	Motion sensor+Timing control +light control	12HOUR
ST030V-30W	MONO 18V/55W	12V 18AH	Motion sensor+Timing control +light control	12HOUR
ST040V-40W	MONO 18V/65W	12V 32AH	Motion sensor+Timing control +light control	12HOUR
ST050V-50W	MONO 18V/80W	12V 38AH	Motion sensor+Timing control +light control	12HOUR
ST060V-60W	MONO 18V/90W	12V 42AH	Motion sensor+Timing control +light control	12HOUR
ST080V-80W	MONO 18V/90W	12V 50AH	Motion sensor+Timing control +light control	12HOUR
ST100V-100W	MONO 18V/100W	12V 54AH	Motion sensor+Timing control +light control	12HOUR
ST120V-120W	MONO 18V/110W	12V 60AH	Motion sensor+Timing control +light control	12HOUR



HY-SEL-001H



PARAMETER

Item No.:HY-SEL-001H
 Lamp Power:2.5W
 Luminous Flux :260LM
 Beam Angle:120°
 Sensor Angle:120°
 Solar Panel: 5V 3.0W
 Li-ion Battery:3.7V 3200mAh
 Working Time (fully charged): PIR SENSOR full-light by Sensored>4Hrs
 Weak-light by energy-saving>24Hrs
 Lamp Body Material:PC
 Color:Black/White
 Body Size:φ220mm*21mm
 Solar Panel Size:160*160mm
 Pillar Height:60cm/80cm
 IP:IP54
 Guarantee: 1year



HY-SEL-002H



PARAMETER

Item NO.:HY-SEL-002H
 Lamp Power:3.0W
 Luminous Flux :190LM
 Beam Angle:120°
 Sensor Angle:120°
 Solar Panel: 5V 3.0W
 Li-ion Battery:3.7V 3000mAh
 Working Time (fully charged): PIR SENSOR full-light by Sensored>4Hrs
 Weak-light by energy-saving>24Hrs
 Lamp Body Material:PC
 Color:Black/White
 Body Size:φ220mm*21mm
 Solar Panel Size:160*160mm
 Pillar Height:60cm/80cm
 IP:IP54
 Guarantee: 1year



HY-SEL-003H



PARAMETER

Item NO.:HY-SEL-003H
 Lamp Power:3.0W
 Luminous Flux :190LM
 Beam Angle:180°
 Sensor Angle:180°
 Solar Panel: 5V 3.0W
 Li-ion Battery:3.7V 3000mAh
 Working Time (fully charged): PIR SENSOR full-light by Sensored>4Hrs
 Weak-light by energy-saving>24Hrs
 Lamp Body Material:PC
 Color:Black/White
 Body Size:φ220mm*21mm
 Solar Panel Size:160*160mm
 Pillar Height:60cm/80cm
 IP:IP54
 Guarantee: 1year



EML0006

Input voltage:AC220-240V 50/60Hz
 Light source:2x2W LED
 Operation:DC
 Battery:3.6V 1800mAh Ni-Cd
 Emergency time:3/4/5 hours
 Charging time:24hours
 Material:Metal+Plastic
 Protection level:IP20
 Product size:270x87x262mm



EML0007

Input voltage:AC220-240V 50/60Hz
 Light source:2x2W LED
 Operation:DC
 Battery:3.6V 1800mAh Ni-Cd
 Emergency time:3/4/5 hours
 Charging time:24hours
 Material:Metal+Plastic
 Protection level:IP20
 Product size:270x87x305mm



EML0008

Input voltage:AC100-250V 50/60Hz
 Light source:2x2W LED
 Operation:DC
 Battery:3.6V 1800mAh Ni-Cd
 Emergency time:3-4 hours
 Charging time:24hours
 Material:Plastic
 Protection level:IP20
 Product size:300x140x90mm



EML0005

Input voltage:AC220-240V 50/60Hz
 Light source:2x2W LED
 Operation:DC
 Battery:3.6V 1800mAh Ni-Cd
 Emergency time:3/4/5 hours
 Charging time:24hours
 Material:Metal+Plastic
 Protection level:IP20
 Product size:375x25x198mm



EML0002

Input voltage:AC100-250V 50/60Hz
 Light source:LED φ5 8pcs
 Operation:AC/DC
 Battery:3.6V 600mAh Ni-Cd
 Emergency time:2/3/4 hours
 Charging time:24hours
 Material:Aluminium+Acrylic
 Protection level:IP20
 Product size:260x90x50mm



EML0009/EML0010

Input voltage:AC100-250V 50/60Hz
 Light source:LED φ5 4pcs
 Operation:AC/DC
 Battery:3.6V 800mAh Ni-Cd
 Emergency time:2-3 hours
 Charging time:24hours
 Material:metal+glass
 Protection level:IP65



Model: GBL03D
 Power: 10pcs SMD 5730
 Size: 110x45mm/170x70mm
 Material: Stainless steel
 Voltage: AC85-265V
 IP65



Model: GBL03E
 Power: 10pcs SMD 5730
 Size: 110x45mm/170x70mm
 Material: Stainless steel
 Voltage: AC85-265V
 IP65



Model: GBL03F
 Power: 10pcs SMD 5730
 Size: 110x45mm/170x70mm
 Material: Stainless steel
 Voltage: AC85-265V
 IP65



Model: HYL-3W-D17A
 Power: 3W
 Size: Φ40xW52xH240
 Lumen: 200Lm
 IP66
 Voltage: AC220-240V
 RA>80
 CCT: 3000K/4000K/6500K
 PF>0.5
 Beam angle: 38°
 Life span: ≥25000hrs
 Certification: CE



Model: HYL-3W-S17A
 Power: 2*3W
 Size: Φ40xW135xH280
 Lumen: 2*200Lm
 IP66
 Voltage: AC220-240V
 RA>80
 CCT: 3000K/4000K/6500K
 PF>0.5
 Beam angle: 38°
 Life span: ≥25000hrs
 Certification: CE



Model: HYL-5W-D17B
 Power: 5W
 Size: Φ50xW65xH310
 Lumen: 360Lm
 IP65
 Voltage: AC220-240V
 RA>80
 CCT: 3000K/4000K/6500K
 PF>0.5
 Beam angle: 30°
 Life span: ≥25000hrs
 Certification: CE



Model: HYL-5W-S17B
 Power: 2*5W
 Size: Φ50xW135xH310
 Lumen: 2*360Lm
 IP65
 Voltage: AC220-240V
 RA>80
 CCT: 3000K/4000K/6500K
 PF>0.5
 Beam angle: 30°
 Life span: ≥25000hrs
 Certification: CE



Model: HYL-5W-D17A
 Power: 5W
 Size: Φ50xWΦ75xH150
 Lumen: 360Lm
 IP65
 Voltage: AC220-240V
 RA>80
 CCT: 3000K/4000K/6500K
 PF>0.5
 Beam angle: 30°
 Life span: ≥25000hrs
 Certification: CE



Model: HYL-5W-S17A
 Power: 2*5W
 Size: Φ50xWΦ115xH150
 Lumen: 2*360Lm
 IP65
 Voltage: AC220-240V
 RA>80
 CCT: 3000K/4000K/6500K
 PF>0.5
 Beam angle: 30°
 Life span: ≥25000hrs
 Certification: CE



Model: HYL-5W-S17A-SE
 Power: 2*5W
 Size: Φ50xWΦ115xH150
 Lumen: 2*360Lm
 IP44
 Voltage: AC220-240V
 RA>80
 CCT: 3000K/4000K/6500K
 PF>0.5
 Beam angle: 30°
 Sensor angle: 120°
 Sensor distance: 0-8m
 Life span: ≥25000hrs
 Certification: CE



Model: GBL03G/H
 Power: 4pcs SMD 5730
 Size: 85x85mm
 Material: Stainless steel
 Voltage: AC85-265V
 IP65



Model: GAH0010
 Power: 3W COB
 Size: 85x85mm
 Material: Aluminium
 Voltage: AC85-265V
 IP65



Model: GAH0012
 Power: 6W 6LED
 Size: 250x70mm
 Material: Aluminium
 Voltage: AC85-265V
 IP65



Model: GBL03J
 Power: 5/7/10/20/30W
 Material: Aluminium+Stainless steel
 Voltage: AC85-265V
 IP65



Model: GBL03C
 Power: 3w
 Size: Φ100mm
 Material: Aluminium
 Voltage: AC85-265V
 IP65